



4 CH MPEG-4 DVR



User's Manual

Please read instructions thoroughly before operation and retain it for future reference.
The image shown above may differ from the actual product appearance.

IMPORTANT SAFEGUARD

	CAUTION RISK OF ELECTRIC SHOCK	
<p>CAUTION: To reduce the risk of electric shock, do not expose this apparatus to rain or moisture. Only operate this apparatus from the type of power source indicated on the label. The company shall not be liable for any damages arising out of any improper use, even if we have been advised of the possibility of such damages.</p>		

The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated “dangerous voltage” within the product’s enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.




This exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.



CE Mark

This apparatus is manufactured to comply with the radio interference requirements.



The company does not warrant that this manual will be uninterrupted or error-free. We reserve the right to revise or remove any content in this manual at any time.

THIS PRODUCT IS LICENSED UNDER THE MPEG-4 VISUAL PATENT PORTFOLIO LICENSE FOR THE PERSONAL AND NON-COMMERCIAL USE OF A CONSUMER FOR (i) ENCODING VIDEO IN COMPLIANCE WITH THE MPEG-4 VISUAL STANDARD (“MPEG-4 VIDEO”) AND/OR (ii) DECODING MPEG-4 VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL AND NON-COMMERCIAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED BY MPEG LA TO PROVIDE MPEG-4 VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION INCLUDING THAT RELATING TO PROMOTIONAL INTERNAL AND COMMERCIAL USES AND LICENSING MAY BE OBTAINED FROM MPEG LA, LLC. SEE [HTTP://WWW.MPEGLA.COM](http://www.mpegla.com).

Note: Firmware Version: 1069-10-J6-04-AA-11; AP Version: 1049

Note: For any changes of AP, please refer to your distributor.

Note: Any changes of this manual are subject to the actual product without further notification.

TABLE OF CONTENTS

PARTS AND FEATURES

1.1 FEATURES	1
1.2 PACKAGE CONTENTS	1
1.3 SPECIFICATION	2
1.4 FRONT PANEL	4
1.5 REAR PANEL (Model 1)	6
1.5 REAR PANEL (Model 2)	7
1.5 REAR PANEL (Model 3)	8
1.5 REAR PANEL (Model 4)	9

GETTING STARTED

2.1 GETTING STARTED	10
---------------------------	----

BASIC OPERATION

3.1 RECORDING	11
3.2 PLAYBACK	12

DETAILED MENU CONFIGURATION

4.1 MENU TREE	13
4.2 MAIN MENU OPTIONS_ RECORD	14
4.3 MAIN MENU OPTIONS_ TIMER	15
4.4 MAIN MENU OPTIONS_ DATE	16
4.5 MAIN MENU OPTIONS_ ADVANCE	17
4.6 ADVANCE MENU_ CAMERA	17
4.7 ADVANCE MENU_ DETECTION	18
4.8 ADVANCE MENU_ DISPLAY	20
4.9 ADVANCE MENU_ ALERT	21
4.10 ADVANCE MENU_ REMOTE	22
4.11 ADVANCE MENU_ SYSTEM	23
4.12 ADVANCE MENU_ NETWORK	24
4.13 ADVANCE MENU_ BACKUP	25
4.14 ADVANCE MENU_ HDD INFO	27
4.15 ADVANCE MENU_ EVENT LOG	27

ADDITIONAL OPERATION

5.1 SEARCH	28
5.2 KEY LOCK	29
5.3 SWITCH THE N/P SYSTEM	29
5.4 USB UPGRADE	30
5.5 LICENSED SOFTWARE AP	30
INSTALL THE SOFTWARE AP	30
AP BASIC OPERATION	31
AP ADVANCED SETTING	36
Network	36
DDNS	37
MAIL	37
FTP	38
DVR-CAMERA SETTING	39
DEVICE	39
DETECTION	40
NETWORK BACKUP & PLAYBACK	41
SEARCH LIST	43
TIMER RECORD	44
DATE	44
RECORD SETTING	44
ALARM	45
GENERAL	45
ACCOUNT	46
ONLINE USER INFO	46
FILE PATH	46
5.6 OPERATION VIA IE BROWSER	47

TROUBLESHOOTING

6.1 FAQ	48
---------------	----

<u>APPENDIX #1</u> INSTALL HDD	49
---	----

<u>APPENDIX #2</u> PIN CONFIGURATION	51
---	----

<u>APPENDIX #3</u> RS232 PROTOCOL	52
--	----

<u>APPENDIX #4</u> RECORDING TIME TABLE	53
--	----

<u>APPENDIX #5</u> COMPATIBLE USB FLASH DRIVE BRAND	55
--	----

<u>APPENDIX #6</u> COMPATIBLE HDD BRAND	56
--	----

1.1 FEATURES

MPEG4 DVR Technology

- Compression format providing crystal clear images with real time performance

Multiplex

- Allow live display, record, playback, backup, and network at the same time

Long-Recording Hours:

- Model 1&2: 500GB can record more than 18 days. (4CH, Frame Best Quality, 30IPS)
- Model 3&4: 500GB can record more than 5 days. (4CH, Frame Best Quality, 30IPS)

Backup Function:

- For model 1, support CD R/W, USB flash drives and network remote recording & backup
- For model 2 and 4, support image backup with USB flash drives and network remote recording & backup
- For model 3, support network remote recording & backup

Remote Surveillance:

- Support remote surveillance with licensed software AP and IE browser
- Web surveillance up to 5 users simultaneously

Intelligent Motion Trigger Recording:

- With advanced motion detection function, scheduled motion detection recording (4 different adjustable factors for motion detection sensitivity) and convenient search function, customized security environments are achieved
- Alarm trigger recording will send alerts with images to designated e-mails and the FTP address
- Support pre-alarm recording (8MB)

Covert Recording:

- A mask replaces the live image with a blank screen & the monitor shows nothing but recording is still on

A/V Support:

- Support 2 audio-in, 1 audio-out to record sounds (Model 1 and Model 2)
Support 1 audio-in, 1 audio-out to record sounds (Model 3 and Model 4)
- Support VGA output to monitor (optional)

General:

- Model 1, 2 and 4 support multi-language OSD
- System auto recovery after power reconnected
- Support daylight saving function
- Support manual / timer / motion / alarm / network remote recording functions
- Watermark function ensures authentication of recorded images
- Support TCP/IP, PPPoE, DHCP and DDNS network connection

1.2 PACKAGE CONTENTS

MODEL	Model 1	Model 2	Model 3	Model 4
Digital Video Recorder	√	√	√	√
Adapter	√	√	√	√
Licensed Software AP	√	√	√	√
External I/O Port Pin Connector	√	√	√	√
Screws * 4	√	√	√	√
Power and Data Bus	-	√	√	√
IR Receiver & Transmitter				√
Manual & Quick Start	√	√	√	√

NOTE: Please check the package contents to make sure that you receive all accessories shown above.




1.3 SPECIFICATION

	Model 1	Model 2	Model 3	Model 4
Video System	NTSC / PAL (switchable)			
Video Compression Format	Frame: MPEG 4 ; CIF: MPEG4		Frame: MJPEG ; CIF: MPEG4	
Video Input	4 Channels. Composite video signal 1 Vp-p 75Ω BNC			
Video Loop Out	4 Channels. Composite video signal 1 Vp-p 75Ω BNC			
Video Output	Main Monitor Output: Composite video signal 1 Vp-p 75Ω BNC Call Monitor Output: Composite video signal 1 Vp-p 75Ω BNC			
Maximum Recording Rate	Frame: 720 × 480 pixels with 30 IPS <NTSC> / 720 × 576 pixels with 25 IPS <PAL> CIF: 352 × 240 pixels with 120 IPS <NTSC> / 352 × 288 pixels with 100 IPS <PAL>			
Adjustable Recording Speed	Frame: 30, 15, 7, 3 IPS <NTSC> / 25, 12, 6, 3 IPS <PAL> CIF: 120, 60, 30, 15 IPS <NTSC> / 100, 50, 25, 12 IPS <PAL>			
Image Quality Setting	Best, High, Normal, and Basic			
Hard Disk Storage	IDE type, ATA66, supported HDD *1 , support HDD capacity over 400GB			
HDD Quick Cleaning	Quick clean up the "index system" of the recorded files. 250GB under 2 seconds			
Recording Mode	Manual / Timer / Motion / Alarm / Remote			
Watermark	Yes			
Refresh Rate	120 IPS for NTSC / 100 IPS for PAL			
Audio I/O	2 audio inputs, 1 audio output (Mono)		1 audio input, 1 audio output (Mono)	
Motion Detection Area	16 × 12 grids per camera for all channels			
Motion Detect Sensitivity	4 adjustable variables with precise calculation for motion detection			
Pre-alarm Recording	Yes (8MB)			
USB Interface	Support USB 1.1/ 2.0 flash drive		N / A	Support USB 1.1/ 2.0 flash drive
Backup Device	Support USB 1.1/ 2.0 flash drive, CD R/W and network remote backup	Support USB 1.1/ 2.0 flash drive and network remote backup	Network remote backup	Support USB 1.1/ 2.0 flash drive and network remote backup

Specification Continued...				
	Model 1	Model 2	Model 3	Model 4
Web Transmitting Compression Format	Motion JPEG			
Ethernet	10/100 Base-T. Support remote control and live view via Ethernet			
Web Interface	Support licensed software AP and IE browser			
Remote Alarm Notification	E-mail images, and upload images to FTP site's specific account			
Network Connection	Support TCP/IP, PPPoE, DHCP and DDNS functions			
PTZ control	Support PELCO-D protocol			
IR Transmitter	N/A			YES
Dwell Time (Sequential Channel Switch)	Programmable with adjustable dwell time			
Alarm I/O	4 inputs, 1 output			
Digital Zoom	2X digital zoom (live mode)			
Key Lock	Yes			
Video Loss Detection	Yes			
Camera Title	Support up to 6 letters			
Video Adjustable	Hue/Color/Contrast/ Brightness			
Date Display Format	YY/MM/DD, DD/MM/YY, MM/DD/YY, and Off			
Power Source	DC 19V			
Power Consumption	< 42 W			
Operating Temperature	10°C ~ 40°C (50°F~104°F)			
Dimensions (mm)	375mm (W) × 61mm (H) × 281mm (D)	343mm (W) × 59mm (H) × 223mm (D)	345mm (W) x 68.3mm (H) x 225mm (D)	
System Recovery	System auto recovery after power reconnected			
Optional Peripheral	VGA converter			


The specifications of the actual products are subject to change without further notification.

1.4 FRONT PANEL


- 1) **“LED LIGHT”** :
HDD: HDD is reading or recording
HDD Full: HDD is full.
ALARM: Once the alarm is triggered
TIMER: When timer recording is turned on
PLAY: Under playing status
REC: Under recording status
- 2) **“MENU”** :
Press “MENU” button to enter the main menu.
- 3) **“ENTER” / “SET”** :
Press “ENTER” button to confirm the setting.
Press “SET” to change the position of the channel display.
Press “▲▼◀▶” to select the channel which you would like to change.
Press “+” or “-” to select the channel which You would like to show.
- 4) **“SEARCH”** :
Press “SEARCH” button to enter the search menu.
- 5) **“SLOW”** :
Under the playback mode, press “SLOW” button to show slow playback.
- 6) **“ZOOM”** :
Press “ZOOM” button to enlarge the picture of selected channel (under the live mode).
- 7) **“” / “-”** :
Press “” button to show the 4 channel display mode.
Press “-” button to change the setting in the menu.
- 8) **“SEQ” / “+”** :
Press “SEQ” button to activate the call monitor function and press “SEQ” button again to escape the call monitor mode.
Press “+” button to change the setting in the menu.
- 9) **“” or “Power”** :
Press this button to turn on / off the DVR.
(Under the recording mode, please stop recording before turning off the DVR).


10) "CH1" "CH2" "CH3" "CH4" :
Press "1" "2" "3" "4" buttons to select the channel to display.

11) "REC" :
Press "REC" button to activate the manual recording.


12) "  " or "PLAY" :
Press this button to playback the recorded data.



13) "UP / PAUSE , DOWN / STOP, LEFT / FAST REWIND, RIGHT / FAST FORWARD" :
Press "▲▼◀▶" to move the cursor up / down / left / right.

Under the playback mode, press "  " button to pause playback.



Under the playback mode, press "  " button to stop playback.

Under the playback mode, press "  " button to fast rewind.

Under the playback mode, press "  " button to fast forward.

14) "  " or "  " :

Press these two buttons to select live or playback sounds of the 2 audio channels.

15) "  " or "  " :



Press these two buttons at the same time to enter / exit the PTZ control mode.



In the PTZ control mode,

* Zoom in : Press "+" button


* Zoom out: Press "-" button

* Adjust PTZ angle: Press "UP, DOWN, LEFT, RIGHT" buttons

16) Press "  " or "Power" button on the DVR front panel to shutdown. Then, press and hold "▶" first, and press "  " or "Power" to switch to PAL system.
(Press the buttons until the monitor shows video images)


17) Press "  " or "Power" button on the DVR front panel to shutdown. Then, press and hold "◀" first, and press "  " or "Power" to switch to NTSC system.
(Press the buttons until the monitor shows video images)

18) Press "MENU" + "ENTER" buttons on the DVR front panel to lock keys and to log in another username.

19) For Model 1, press "  " buttons at the same time to open / close the CD WRITER.

1.5 REAR PANEL


Model 1

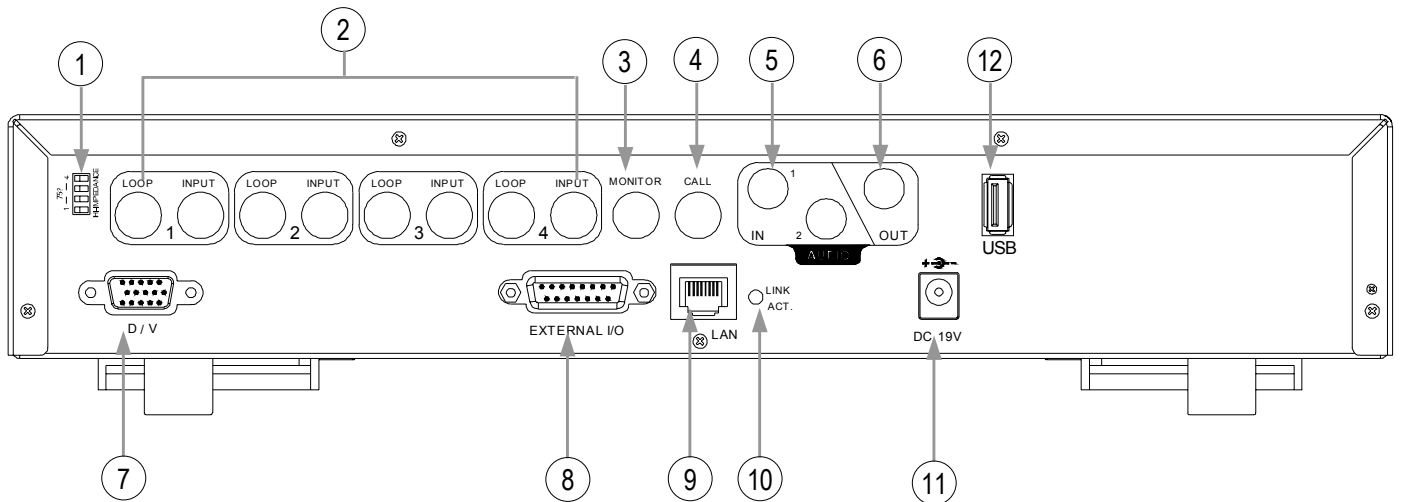

- 1) **75Ω / HI-IMPEDANCE:**
When using Loop function, please switch to HI-IMPEDANCE. When you don't use Loop function, please switch to 75Ω.
- 2) **VIDEO INPUT (CHANNEL 1 - 4):** Connect to video sources, such as cameras.
LOOP (CHANNEL 1 - 4): Video output.
- 3) **MONITOR:**
Connect to Main monitor.
- 4) **CALL MONITOR:**
Connect to CALL monitor. Show the channel switch display. When the alarm is triggered, the call monitor will show the image of the triggered channel for a period of time.
- 5) **AUDIO IN (2 audio-in):**
Connect to audio sources, such as cameras equipped with the audio function. When users start the recording function, the audio input will be recorded.
- 6) **AUDIO OUT:**
Connect to a monitor or speaker.
With 1 mono audio output from the same source.
- 7) **D/V PORT (Digital Video Port):**
Connect to a VGA converter.
- 8) **EXTERNAL I/O PORT:**
Insert the supplied 15PIN DSUB to this port for connecting external devices (alarm input, external alarm, PTZ camera).
For detailed I/O port PIN configuration, please refer to Appendix #2.
- 9) **LAN:**
Connect to Internet by LAN cable.
- 10) **LINK / ACT LED light:**
When the Internet is activated, the LED light will be on.
- 11) **POWER:**
Connect to the supplied adapter.
- 12) **USB:**
Support USB flash drive firmware update and file backup.

1.5 REAR PANEL Continued...


Model 2

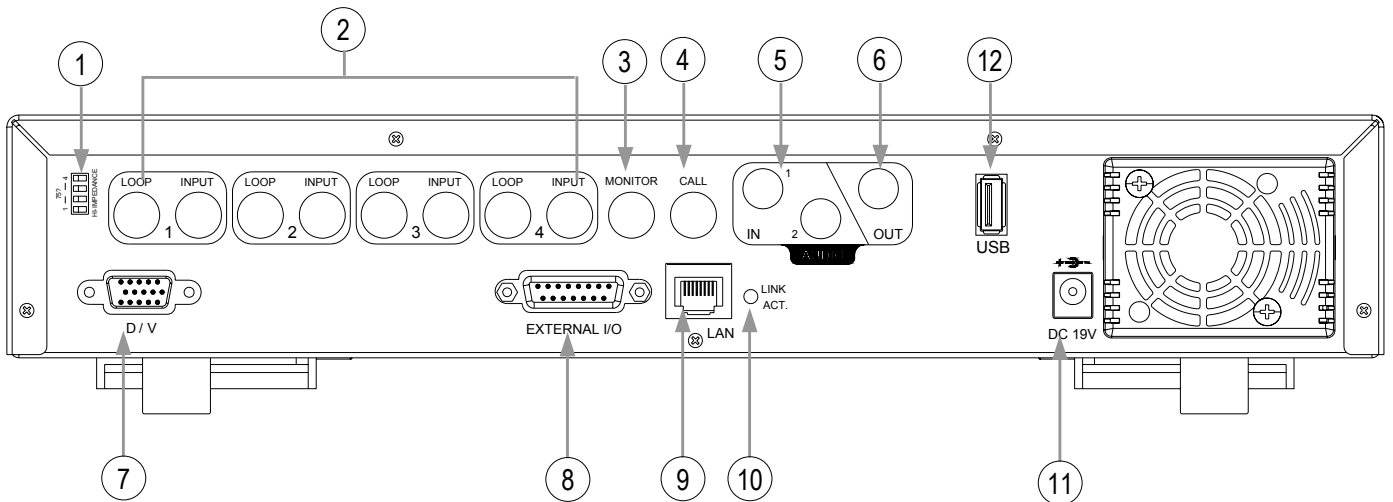

- 1) 75Ω / HI-IMPEDANCE:
When using Loop function, please switch to HI-IMPEDANCE. When you don't use Loop function, please switch to 75Ω.
- 2) VIDEO INPUT (CHANNEL 1 - 4): Connect to video sources, such as cameras.
LOOP (CHANNEL 1 - 4): Video output.
- 3) MONITOR:
Connect to Main monitor.
- 4) CALL MONITOR:
Connect to CALL monitor. Show the channel switch display. When the alarm is triggered, the call monitor will show the image of the triggered channel for a period of time.
- 5) AUDIO IN (2 audio-in):
Connect to audio sources, such as cameras equipped with the audio function. When users start the recording function, the audio input will be recorded.
- 6) AUDIO OUT:
Connect to a monitor or speaker.
With 1 mono audio output from the same source.
- 7) D/V PORT (Digital Video Port):
Connect to a VGA converter.
- 8) EXTERNAL I/O PORT:
Insert the supplied 15PIN DSUB to this port for connecting external devices (alarm input, external alarm, PTZ camera).
For detailed I/O port PIN configuration, please refer to Appendix #2.
- 9) LAN:
Connect to Internet by LAN cable.
- 10) LINK / ACT LED light:
When the Internet is activated, the LED light will be on.
- 11) POWER:
Connect to the supplied adapter.
- 12) USB:
Support USB flash drive firmware update and file backup.

1.5 REAR PANEL Continued...


Model 3

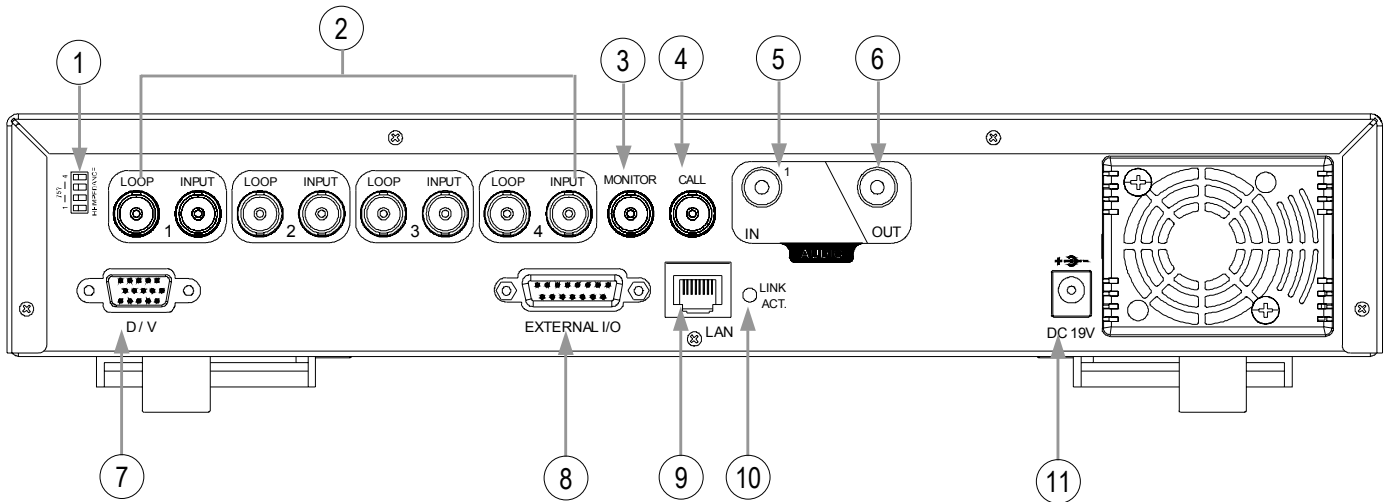

- 1) **75Ω / HI-IMPEDANCE:**
When using Loop function, please switch to HI-IMPEDANCE. When you don't use Loop function, please switch to 75Ω.
- 2) **VIDEO INPUT (CHANNEL 1 - 4):** Connect to video sources, such as cameras.
LOOP (CHANNEL 1 - 4): Video output.
- 3) **MONITOR:**
Connect to Main monitor.
- 4) **CALL MONITOR:**
Connect to CALL monitor. Show the channel switch display. When the alarm is triggered, the call monitor will show the image of the triggered channel for a period of time.
- 5) **AUDIO IN (1 audio-in):**
Connect to audio sources, such as cameras equipped with the audio function. When users start the recording function, the audio input will be recorded.
- 6) **AUDIO OUT:**
Connect to a monitor or speaker.
With 1 mono audio output from the same source.
- 7) **D/V PORT (Digital Video Port):**
Connect to a VGA converter.
- 8) **EXTERNAL I/O PORT:**
Insert the supplied 15PIN DSUB to this port for connecting external devices (alarm input, external alarm, PTZ camera).
For detailed I/O port PIN configuration, please refer to Appendix #2.
- 9) **LAN:**
Connect to Internet by LAN cable.
- 10) **LINK / ACT LED light:**
When the Internet is activated, the LED light will be on
- 11) **POWER:**
Connect to the supplied adapter.

1.5 REAR PANEL Continued...

Model 4

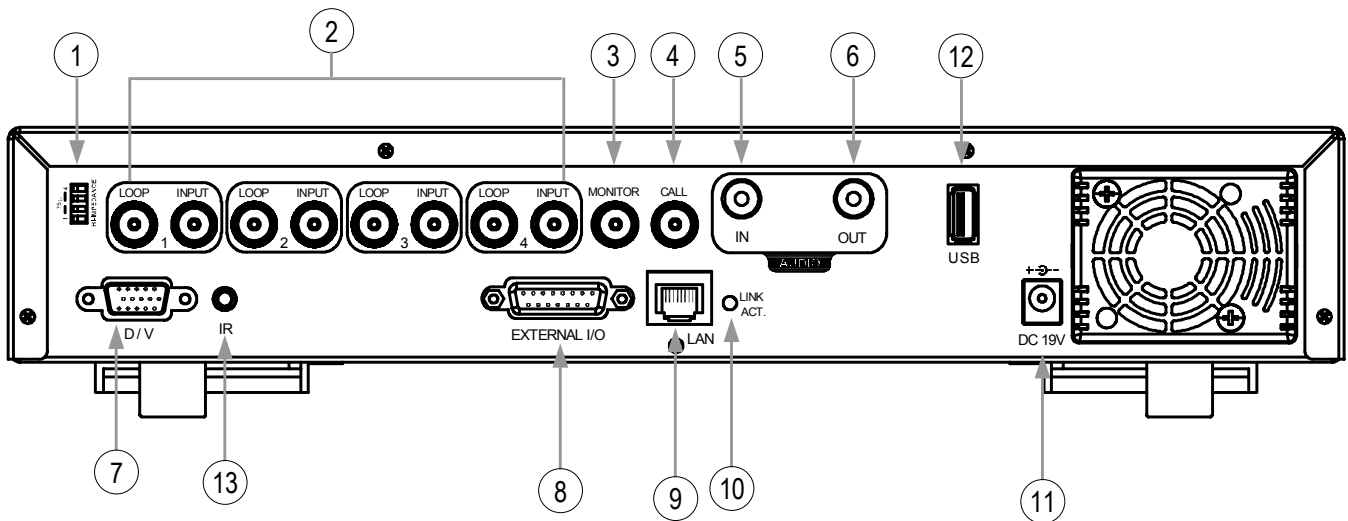

- 1) 75Ω / HI-IMPEDANCE:
When using Loop function, please switch to HI-IMPEDANCE. When you don't use Loop function, please switch to 75Ω.
- 2) VIDEO INPUT (CHANNEL 1 - 4): Connect to video sources, such as cameras.
LOOP (CHANNEL 1 - 4): Video output.
- 3) MONITOR:
Connect to Main monitor.
- 4) CALL MONITOR:
Connect to CALL monitor. Show the channel switch display. When the alarm is triggered, the call monitor will show the image of the triggered channel for a period of time.
- 5) AUDIO IN (1 audio-in):
Connect to audio sources, such as cameras equipped with the audio function. When users start the recording function, the audio input will be recorded.
- 6) AUDIO OUT:
Connect to a monitor or speaker.
With 1 mono audio output from the same source.
- 7) D/V PORT (Digital Video Port):
Connect to a VGA converter.
- 8) EXTERNAL I/O PORT:
Insert the supplied 15PIN DSUB to this port for connecting external devices (alarm input, external alarm, PTZ camera).
For detailed I/O port PIN configuration, please refer to Appendix #2.
- 9) LAN:
Connect to Internet by LAN cable.
- 10) LINK / ACT LED light:
When the Internet is activated, the LED light will be on
- 11) POWER:
Connect to the supplied adapter.
- 12) USB:
Support USB flash drive firmware update and file backup.
- 13) IR PORT:
Connect the IR receiver for remote control.

2.1 GETTING STARTED

Connect all the devices to construct a surveillance system.

- 1) Install HDD:
The HDD must be installed before the DVR is turned on. Please refer to Appendix #1 for HDD installation instructions.
- 2) Connect cameras, monitors and external devices. Please refer to “Section 1.5 Rear Panel” for connection, and Appendix#2 for pin configurations of the external I/O port.

NOTE:

Be sure the cameras are connected and power-supplied before the DVR is powered on. Otherwise the DVR will not be able to detect N/P system automatically.


- 3) Connect the AC power cord to power adapter and plug into an electrical outlet.
The “⏻” or “Power” LED will be on as red.
Press the “⏻” or “Power” button. The “⏻” or “Power” LED will be on as green.
It takes approximately 10 to 15 seconds to boot the system.
- 4) Set the date and time on your DVR. Please **DO NOT** change the date or time on your DVR after the recording function is activated. The recorded data will be disordered and you will not be able to find the recorded file to backup by time search.

NOTE:

If users change the date or time accidentally when the recording function is activated, it's recommended to clear all HDD data, and start recording again.

For the connection application, please see the illustration below for an example.

Take Model 1 as an example

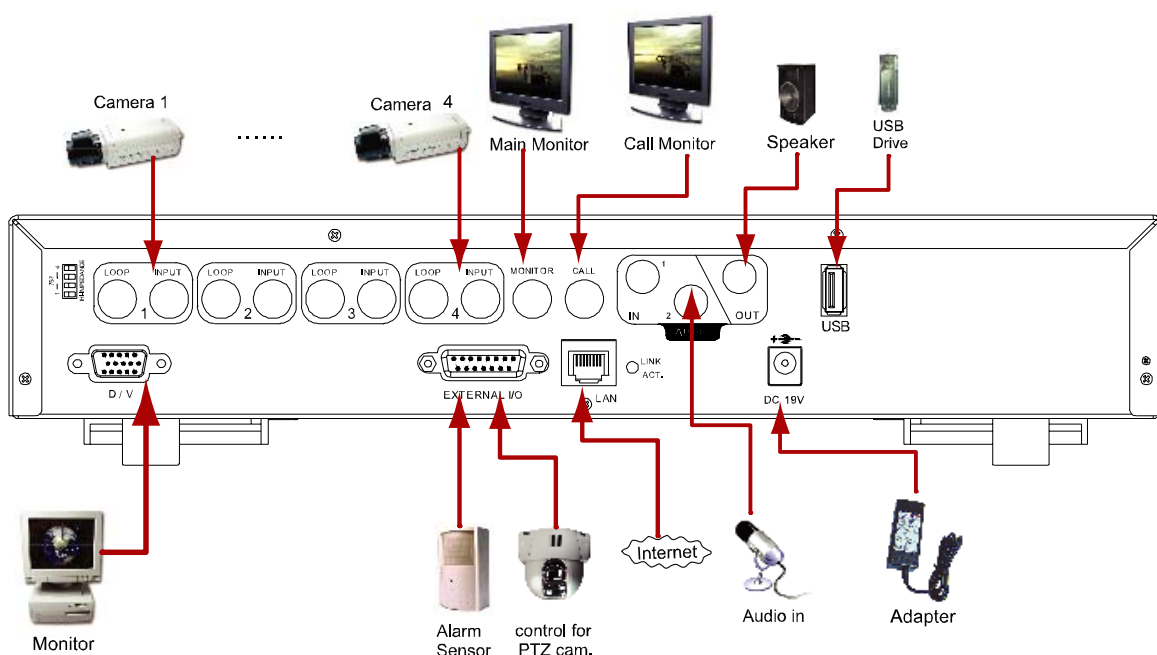

3.1 RECORDING

The DVR offers three recording modes, manual record, event record and timer record. If power is off accidentally, recorded video files will still be still stored in the HDD. DVR will return to the original recording status after power is on again.

- 1) **MANUAL RECORDING** (continuous recording) :
Recording is initiated by manually pressing the "REC" button, indicated by the sign "●" on the screen.
- 2) **EVENT RECORDING** (triggered by motion and external alarm) :
When this function is activated, the recording is triggered by motion or external alarms, indicated by the sign "🚦" (motion) or "🚨" (external alarm) on the screen.
- 3) **TIMER RECORDING** (scheduled time) :
Recording is scheduled by Timer, indicated by the sign "TIMER RECORD".

There must be at least 8192 images of recorded data for playback to work properly. If not, your DVR will stop the playback. For example, if the IPS is set to 30, the recording time should be at least 273 seconds (8192 images / 30 IPS) for the playback to work properly.

When the recording function is activated, please **DO NOT** change the date or time on your DVR. The recorded data will be disordered and you will not be able to find the recorded file to backup by time search.


NOTE:

If users change the date or time accidentally when the recording function is activated, it's recommended to clear all HDD data, and start recording again.

Overwriting View

If you activate overwriting mode, you will also see "-OW-" under the recording mode except the system time, available HDD capacity, recording icon and channel title.

When the HDD is full under "-OW-" recording mode, the previous recorded files may be overwritten without further warning notice. Under "-OW-" mode, your DVR will clear 8GB data from the oldest for overwriting once the HDD is full.

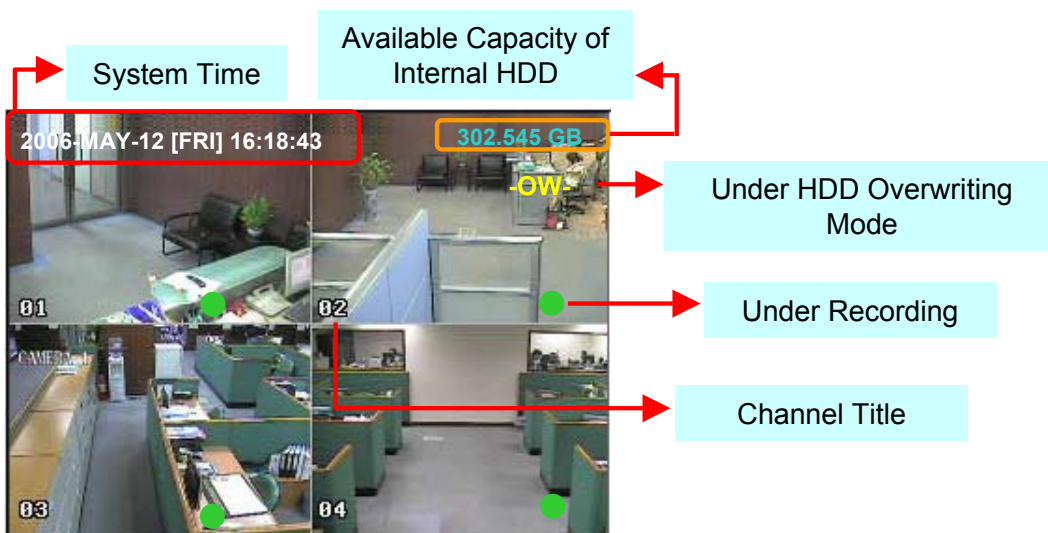





3.2 PLAYBACK



Press “” or “PLAY” button and the DVR will display the last recorded video.





1) **FAST FORWARD (F.F.) & FAST REWIND (REW):**

You can increase the speed for fast forward and rewind on the DVR.
In the playback mode,

- * Press “ ” once to get 4X speed forward and press twice to get 8X speed, etc., and the maximum speed is 32X.
- * Press “ ” once to get 4X speed rewind and press twice to get 8X speed, etc., and the maximum speed is 32X.
- * The type of the recording image size (Frame or CIF) will also be shown on the screen.

2) **PAUSE / IMAGE JOG:**






Press “ ” button to pause the current image displayed on the screen.
In the Pause mode,

- * Press “ ” once to get one frame forward.
- * Press “ ” once to get one frame rewind.

3) **STOP:**

Pressing “” button under all circumstances will return DVR to live monitoring mode.



4) **CHANNEL SHIFT:**

- * Display mode:
Press MODE “” button to 4 channels display.
- * Full Screen Switch:
Press “1” “2” “3” “4” buttons to show the full screen channels.
- * Channel display switch:
Press “SET” to change the the position of the channel display.
Press “   ” to select the channel you would like to change.
Press “+” or “-” to select the channel you would like show.
Press “ENTER” button to confirm the setting.

5) **SLOW PLAYBACK:**

Model 1 & 2: Press “**SLOW**” button to get 1/4X speed playback and press twice to get 1/8X.
Model 3: Press “**SLOW**” button to get 1/4X speed playback.

6) **AUDIO:**


Press “” or “”

to select either audio channel from the following 4 options:

- * AUDIO 1 (L) -- audio channel 1, live audio
- * AUDIO 1 (P) -- audio channel 1, playback audio
- * AUDIO 2 (L) -- audio channel 2, live audio
- * AUDIO 2 (P) -- audio channel 2, playback audio

DETAILED MENU CONFIGURATION



4.1 MENU TREE

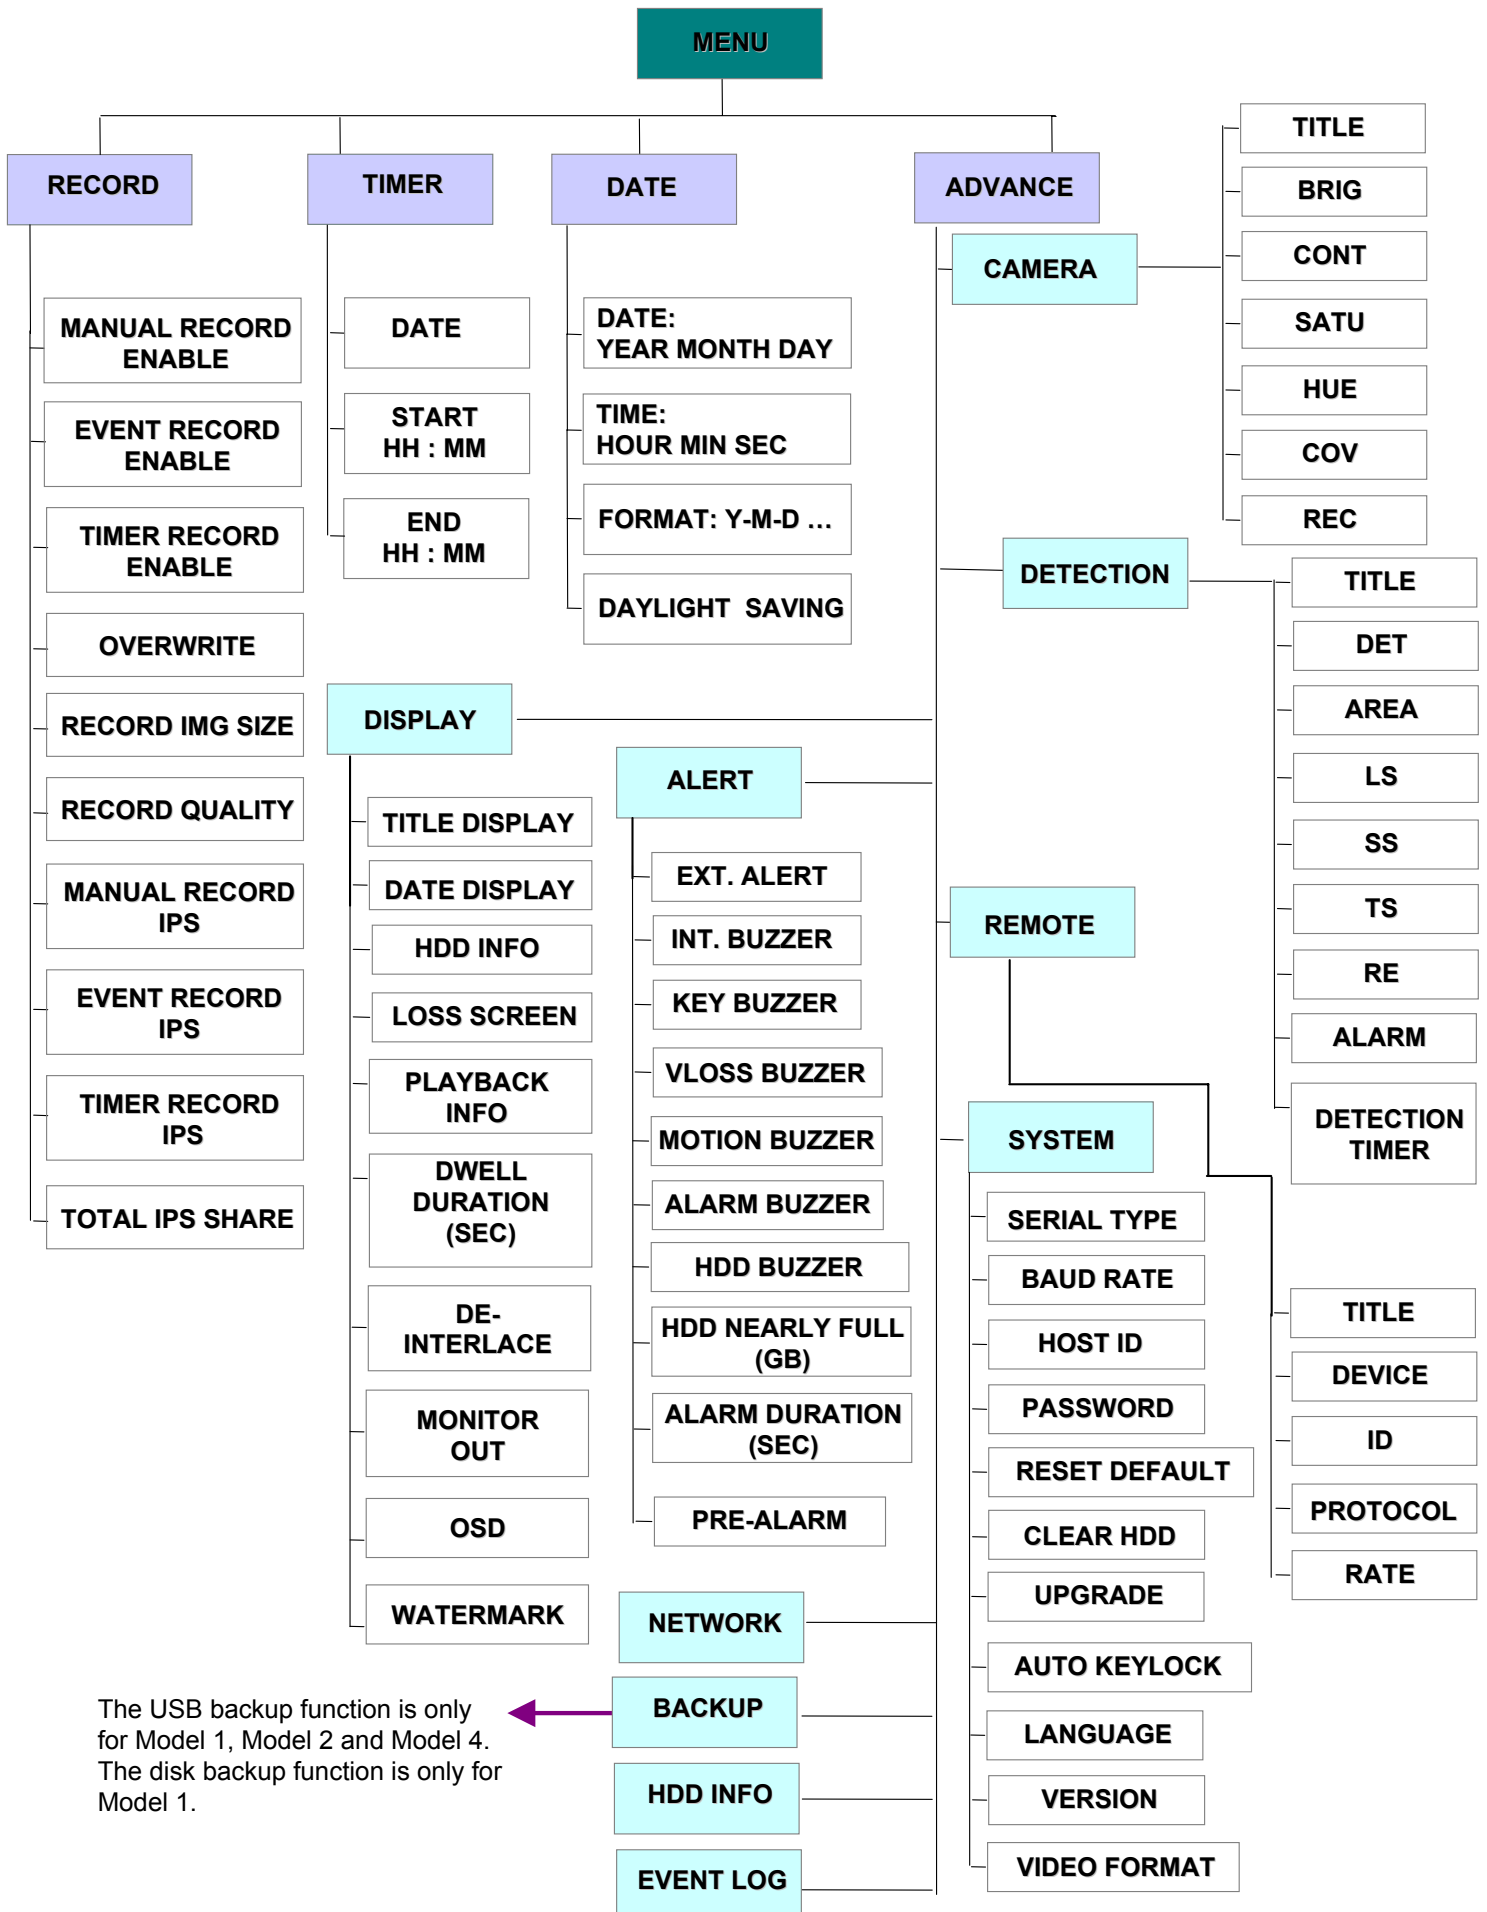

4.2 MAIN MENU OPTIONS __ RECORD

Press “MENU” button to enter the main menu list. **The default admin password is 0000.** Enter the default password and press “ENTER”. (Users could alter the password later. Please refer to “Section 4.11 ADVANCE MENU SYSTEM”)

Move the cursor to “RECORD” and press “ENTER”. The screen will show the following options.

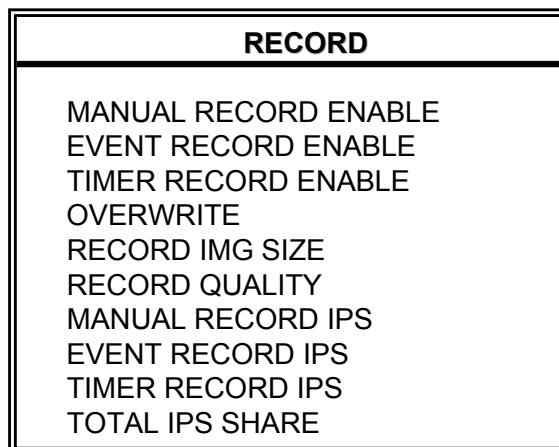

Use the following buttons for menu settings:

- “▲▼◀▶” to move the cursor.
“+ , -” to choose the numbers / selections.
“ENTER” to go to the submenu / to confirm the selection
“MENU” to go to the menu OSD /
to confirm the change / to exit the menu OSD

- 1) MANUAL RECORD ENABLE:
Start / stop the manual recording function.
- 2) EVENT RECORD ENABLE:
Start / stop the event recording function. When this function is activated, the recording will be triggered by the motion or external alarm.
- 3) TIMER RECORD ENABLE:
Start / stop the timer recording function.
- 4) OVERWRITE:
Select to overwrite previous recorded videos in HDD. When the HDD is full under O/W recording mode, previous recorded files will be overwritten without further warning notices.
- 5) RECORD IMG SIZE:
There are two recording options, FRAME and CIF. When changing the record image size, users need to stop recording first.
- 6) RECORD QUALITY:
There are four quality settings: BEST, HIGH, NORMAL & BASIC.
- 7) MANUAL RECORD IPS:
Recording is activated by pressing the “REC” button. Select the images per second of MANUAL RECORD, The options are as following:
NTSC: FRAME: 30, 15, 7, 3
CIF: 120, 60, 30, 15
PAL: FRAME: 25, 12, 6, 3
CIF: 100, 50, 25, 12

8) EVENT RECORD IPS:

Recording is activated by events (alarm and motion trigger). Select the images per second for EVENT RECORD. The options are as following:

NTSC: FRAME: 30, 15, 7, 3

PAL: FRAME: 25, 12, 6, 3

CIF: 120, 60, 30, 15

CIF: 100, 50, 25, 12

9) TIMER RECORD IPS:

Recording is activated by timer schedules. Select the images per second for TIMER RECORD. The options are as following:

NTSC: FRAME: 30, 15, 7, 3

PAL: FRAME: 25, 12, 6, 3

CIF: 120, 60, 30, 15

CIF: 100, 50, 25, 12

10) TOTAL IPS SHARE:

There are two IPS settings:

FIX:


IPS per channel = RECORD IPS ÷ 4 channels

GROUP (Suitable for Frame mode):

IPS per channel = RECORD IPS ÷ number of channels under recording.

NOTE: For Model 3 & 4, the total IPS share is always "FIX".

4.3 MAIN MENU OPTIONS__TIMER




Move the cursor to "TIMER" and press "ENTER". The screen will show the following options.

RECORD			
DATE	START		END
OFF	00 : 00	-	00 : 00
DAILY	08 : 00	-	18 : 00
SUN	06 : 00	-	23 : 00
MON-FRI	00 : 00	-	00 : 00
OFF	00 : 00	-	00 : 00
OFF	00 : 00	-	00 : 00
OFF	00 : 00	-	00 : 00

- 1) DATE:
 Select scheduled record days (SUN/MON/TUE/ WED/ THU/ FRI/ SAT/ MON-FRI / SAT-SUN / DAILY/OFF) to set up timer record schedules.
 NOTE 1 : Specific days could be changed by “+” or “-” button.
 NOTE 2 : If you plan to set the timer recording across the midnight, there are two ways for setting the timer recording schedule. Please follow the instructions below.
Example 1 : If you only want to set the recording timer schedule from every Sunday 23:30 to Monday 23:30, then you could set the recording timer schedule as Sunday from 23:30 to 23:30.
Example 2 : If you plan to set the timer recording from Sunday 08:00 to Monday 15:00, then you could set the recording timer schedule as Sunday from 08:00 to 24:00, and Monday 24:00 to 15:00.
Note: Please turn on “TIMER RECORD ENABLE” in RECORD” menu (see P.14).
- 2) START:
 Select the start time for the recording.
- 3) END:
 Select the finish time for the recording.

4.4 MAIN MENU OPTIONS __ DATE



Move the cursor to “DATE” and press ”ENTER”. The screen will show the following options. Please **DO NOT** change the date or time when the recording function is activated. See “**2.1 GETTING STARTED**” at P.10 for details.

DATE	
DATE	2006-MAY-12 16:30:00
FORMAT	Y-M-D
DAYLIGHT SAVING	ON

- 1) DATE:
 Set the correct time of the DVR (YEAR / MONTH / DAY / HOUR / MIN / SEC)
- 2) FORMAT:
 There are three formats: Y-M-D, M-D-Y, D-M-Y.
- 3) DAYLIGHT SAVING:
 Specify whether to use daylight saving time and time period. (START / END)
 Daylight saving time can be adjusted manually.
 Enter the daylight saving menu mode to set the start time and the end time, and adjust hours of the daylight saving.

DAYLIGHT SAVING	
START	4TH-SUN-MAR 01: 00: 00
END	4TH-SUN-OCT 01: 00: 00
ADJUST	01 : 00

NOTE: The illustrated setting means: During the daylight saving time period (start from the 4th Sunday of March, end on the 4th Sunday of October), the DVR system time will plus one hour.

4.5 MAIN MENU OPTIONS __ ADVANCE

Move the cursor to "ADVANCE" and press "ENTER". The screen will show the following options.

(MENU)
RECORD
TIMER
DATE
▶ ADVANCE

ADVANCE
CAMERA
DETECTION
DISPLAY
ALERT
REMOTE
SYSTEM
NETWORK
BACKUP
HDD INFO
EVENT LOG

4.6 ADVANCE MENU __ CAMERA

Move the cursor to "CAMERA" and press "ENTER". The screen will show the following options.

CAMERA						
TITLE	BRIG	CONT	SATU	HUE	COV	REC
01	110	128	128	128	NO	YES
02	110	128	128	128	NO	YES
03	110	128	128	128	NO	YES
04	110	128	128	128	NO	YES

- 1) TITLE:
Move the cursor to the camera title you want to change, and press "ENTER" to access the setting screen. Assign each channel a title (up to six characters (letters or symbols...)). The default title is the channel number.
- 2) BRIG / CONT / SATU / HUE:
Adjust the Brightness/Contrast/Saturation/Hue of each channel. The level is from 0 to 255. The default value of BRIG is 110. Others are 128.
- 3) COV (COVERT):
Select "YES" to mask the selected channel which is under recording. When this function is activated, the "COV" word will be shown on the screen.
- 4) REC (RECORD):
Select "YES" to enable the record function. Select "NO" to disable recording at all time.
- 5) PREV / NEXT:
Select "PREV" to go to the previous page. Select "NEXT" to go the next page.

4.7 ADVANCE MENU _____ DETECTION


Move the cursor to "DETECTION" and press "ENTER". The screen will show the following options.

DETECTION
DETECTION SETUP
DETECTION TIMER


1) DETECTION SETUP:

DETECTION							
TITLE	DET	AREA	LS	SS	TS	RE	ALARM
01	ON	SETUP	07	03	02	10	OFF
02	ON	SETUP	07	03	02	10	LOW
03	ON	SETUP	07	03	02	10	HIGH
04	ON	SETUP	07	03	02	10	OFF


- a) TITLE:
Show the camera title of each channel.
- b) DET:
Select "ON" to activate the motion detection function of the selected channel.
Select "OFF" to inactivate the motion detect function of the selected channel.
- c) AREA:
Press the "ENTER" button to set the detection area.
Pink blocks represent the area that is not being detected while the transparent blocks are the areas under detection.

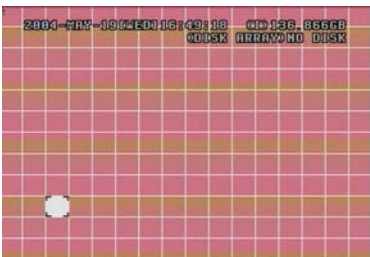


Press "ENTER" to confirm the start area

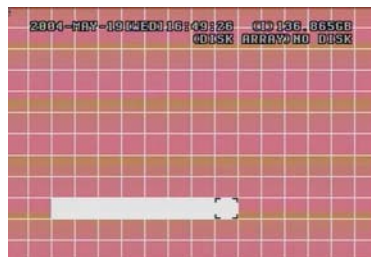

Press ◀ or ▶ to choose the width of the area

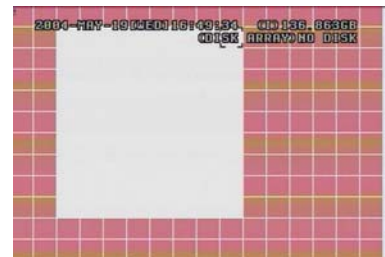


Press ◀ or ▶ to choose the height of the area, and press "ENTER" again to confirm.

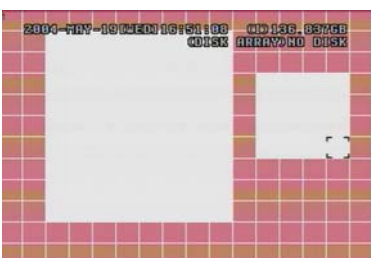

Multi-detection areas



Press "-" to set the whole area under detection

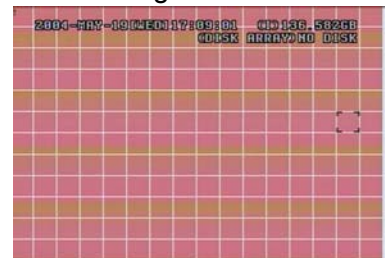

Press "+" to set the whole undetected

▲▼◀▶ : Navigate between targets.

- d) LS :
The sensitivity of comparing two different images. The smaller the value is, the higher sensitivity for motion detection.
The highest sensitivity setting is 00 and the lowest sensitivity setting is 15.
The default value is 07.
- e) SS :
The sensitivity regarding the size of the triggered object on the screen (the number of motion detection grids). The smaller the value, the higher sensitivity for motion detection.
The highest sensitivity setting is 00 and the lowest sensitivity setting is 15.
The default setting is 03.

Note: The default setting of Spatial Sensitivity is 03, which means once a object is detected more than 3 grids, the system will get triggered. So the value of Spatial Sensitivity must be less than the number of grids that you set up for the motion detection area.

- f) TS :
The sensitivity regarding how long the object gets triggered. The smaller the value, the higher motion detection sensitivity will be.
The highest sensitivity setting is 00 and the lowest sensitivity setting is 15.
The default setting is 02.
- g) RE :
The value of RE is a reference for detection. The default value is 10, which means DVR will compare 10 continuous images at one time according to the sensitivity of LS, SS, TS simultaneously. The bigger the value, the higher sensitivity for motion detection. The highest sensitivity is 61.
- h) ALARM:
Select LOW / HIGH for the alarm polarity. The default alarm value is OFF.

- 2) DETECTION TIMER:
Set the date, start time and end time for the detection function.

DETECTION TIMER			
DATE	START		END
OFF	00 : 00	-	00 : 00
DAILY	08 : 00	-	18 : 00
SUN	06 : 00	-	23 : 00
MON-FRI	00 : 00	-	00 : 00
OFF	00 : 00	-	00 : 00
OFF	00 : 00	-	00 : 00
OFF	00 : 00	-	00 : 00

4.8 ADVANCE MENU __ DISPLAY

Move the cursor to "DISPLAY" and press "ENTER". The screen will show the following options.

DISPLAY	
TITLE DISPLAY	ON
DATE DISPLAY	ON
HDD INFO	ON
LOSS SCREEN	BLUE
PLAYBACK INFO	NORMAL
DWELL DURATION (SEC)	2
DE-INTERLACE	ON
MONITOR OUT	MAIN
OSD	SETUP
WATERMARK	ON

- 1) TITLE DISPLAY:
Turn the channel title display on / off.
- 2) DATE DISPLAY:
Turn the date display on / off.
- 3) HDD INFO:
Turn the information display of internal HDD on / off.
- 4) LOSS SCREEN:
Set the color of the video loss screen (Blue or Black)
- 5) PLAYBACK INFO:
Set the position where playback information will be indicated (center or normal (on the button of the left-hand side of the screen)).
- 6) DWELL DURATION (SEC):
Set the duration time of each channel for CALL MONITOR (2, 4, 8, 16 secs.)
- 7) DE-INTERLACE:
Set the "DE-INTERLACE" function on / off.
- 8) MONITOR OUT:
Select "MAIN" when the video output device is CRT monitor.
Select "VGA" when the video output device is LCD monitor.
Note: If the connected video output device is LCD monitor, but the setting here is "MAIN", motion detection area setting will be disabled.
- 9) OSD:
Set the customized OSD color.
- 10) WATERMARK:
In the playback mode of the software AP, users could proof the authenticity of the **BACKUP VIDEO**. If the **BACKUP VIDEO** had been modified, the video image will turn to light red and the playback will be paused.
Please refer to P. 35 for detailed instructions.
Note: This function is always on and non-switchable.

4.9 ADVANCE MENU __ALERT

Move the cursor to "ALERT" and press "ENTER". The screen will show the following options.

ALERT	
EXT. ALERT	ON
INT. BUZZER	ON
KEY BUZZER	ON
VLOSS BUZZER	ON
MOTION BUZZER	ON
ALARM BUZZER	ON
HDD BUZZER	ON
HDD NEARLY FULL (GB)	05
ALARM DURATION (SEC)	05
PRE-ALARM	OFF

- 1) EXT. ALERT:
Set the sound on / off when the external alarm is triggered.
- 2) INT. BUZZER:
Set the sound of KEY / VLOSS / MOTION / ALARM / HDD FULL on or off.
- 3) KEY BUZZER:
Set the sound on / off when pressing the button.
- 4) VLOSS BUZZER:
Set the sound on / off when any video loss happened.
- 5) MOTION BUZZER:
Set the sound on / off when the motion alarm is triggered.
- 6) ALARM BUZZER:
Set the sound on / off when the internal alarm is triggered.
- 7) HDD BUZZER:
Set the sound on / off when the HDD is full.
- 8) HDD NEARLYFULL (GB):
If HDD buzzer is on, you could choose to have a buzzer notification when the HDD available capacity is only xxx GB left.
- 9) ALARM DURATION (SEC):
Press "ENTER" or "+" or "-" button to set the duration time of alarm recording (5, 10, 20, 40 secs.).
- 10) PRE-ALARM:
Set the pre-alarm function on (8MB)/ off.
When pre-alarm and event record functions are both activated, the DVR will record a 8MB file before any alarm / motion is triggered.

4.10 ADVANCE MENU _____ REMOTE

Move the cursor to “REMOTE” and press “ENTER”. The screen will show the following options.

REMOTE				
TITLE	DEVICE	ID	PROTOCOL	RATE
01	PTZ	001	P - D	02400
02	CAMERA	002	NORMAL	02400
03	CAMERA	003	NORMAL	02400
04	CAMERA	004	NORMAL	02400

- 1) TITLE:
Title of each camera.
- 2) DEVICE:
Select to control normal cameras or PTZ cameras for each channel.
- 3) ID:
Set the ID number (0 ~ 255) of PTZ camera.
Note: After connecting to PTZ correctly, the **default ID** of PTZ will be shown on the screen.
Note: Please refer to the below instruction “**PTZ Connection and Control**”
- 4) PROTOCOL:
Select NORMAL (our protocol) or PELCO-D protocol.
- 5) RATE:
Set the baud rate of each channel (2400, 4800, 9600, 19200, 57600). For the connected cameras, such as PTZ and speed dome cameras, etc., please make sure the baud rate setting is the same as the setting here.


*****PTZ Connection and Control: *****

- Device: Our own brand PTZ / Pelco-D protocol PTZ
- Connection: For detailed connection and instructions, please refer to PTZ manuals.
Note:
As for “RS485A and RS485B Port”, please refer to “Section 1.5 Rear Panel”, or refer to “Appendix #2 PIN Configuration”.
- Control Mode: Refer to the front panel description in “Section 1.4 FRONT PANEL” at P.4 and 5.

For detailed PTZ operation, please refer to PTZ manuals.

4.11 ADVANCE MENU _____ SYSTEM

Move the cursor to "SYSTEM" and press "ENTER". The screen will show the following options.

SYSTEM	
SERIAL TYPE	RS - 485
BAUD RATE	02400
HOST ID	003
PASSWORD	SETUP
RESET DEFAULT	RESET
CLEAR HDD	MASTER
UPGRADE	NO  For Model 1, 2 & 4
AUTO KEYLOCK	NEVER
LANGUAGE	ENGLISH
VERSION	1069-10-J6-04-AA-11
VIDEO FORMAT	NTSC

- 1) SERIAL TYPE:
Press "ENTER" or "+" or "-" button to set the control serial type (RS-485, RS-232) of DVR.
- 2) BAUD RATE:
Press "ENTER" or "+" or "-" button to set the BAUD RATE of DVR (2400, 9600, 19200, 57600).
- 3) HOST ID:
Press "ENTER" or "+" or "-" button to set the ID of DVR (0 ~ 255).
- 4) PASSWORD:
Press "ENTER" to set the password for accessing DVR (admin password or guest password). Users who use guest password to access the DVR will only allow to view the live streaming video and sequence display, shift the channel display, and lock keys.
- 5) RESET DEFAULT:
Press "ENTER" to reset all settings as default, and select "YES" to confirm or "NO" to cancel.
- 6) CLEAR HDD:
Press "ENTER", and select "YES" to confirm to clear HDD or "NO" to cancel.
- 7) UPGRADE (This function is only for Model 1, 2 and 4):
Press "ENTER", and select "YES" to confirm upgrade or "NO" to cancel.
Model 3 only supports upgrade from AP remote side. Please refer to P.31.
- 8) AUTO KEYLOCK:
Set the time-out after which the key lock function is activated.
(Never / 10 secs / 30 secs / 60 secs)
- 9) LANGUAGE (Only Model 1, 2 and 4 support multi-language):
Press "ENTER", "+" or "-" to select the language for the OSD.
- 10) VERSION:
The firmware version information.
- 11) VIDEO FORMAT:
The information of the DVR's video format.

4.12 ADVANCE MENU NETWORK

Move the cursor to "NETWORK" and press "ENTER". The screen will show the following options.

NETWORK	
NETWORK TYPE	STATIC
DNS	61. 66. 138. 53
PORT	0 0 8 0

1) NETWORK TYPE (STATIC):

Select NETWORK TYPE, press "+" or "-" button to set the network type as STATIC, and then press "ENTER" to go to the submenu of the network. In the submenu of network type, use "+" or "-" button to set all the information needed in the DVR. See the illustration below.

STATIC	
IP	60. 121. 46. 236
GATEWAY	60. 121. 46. 226
NETMASK	255. 255. 255. 254

2) NETWORK TYPE (DHCP):

The DHCP function needs to be supported by a router or a cable modem network with DHCP services. For detailed DHCP settings, please follow the AP (Licensed Software AP) setup, and then refer to P36 and P37.

3) NETWORK TYPE (PPPoE):

This PPPoE function needs to have one "username" and one "password" subscribed from one ISP supplier.

For detailed PPPoE settings, please follow the AP (Licensed Software AP) setup, and then refer to P36 and P37.

NOTE:

DHCP and PPPoE network types need to apply DDNS services to get "Hostname" to correspond to the dynamic IP address. For detailed DDNS settings, please refer to P.37.

4.13 ADVANCE MENU — BACKUP

This USB backup function is only for Model 1, 2 & 4

Move the cursor to “BACKUP” and press “ENTER”. The screen will show the following options.

BACKUP
USB BACKUP

Select “USB BACKUP” and then press “Enter”.

USB BACKUP	
START TIME	2006-MAY-12 16 : 30 : 00
END TIME	2006-MAY-12 16 : 40 : 00
AVAILABLE SIZE	0512 MB
CHANNEL	● 01 X 02 X 03 X 04
HDD NUM	MASTER
BACKUP TO USB	START

- 1) START TIME:
Select the start time of the backup.
- 2) END TIME:
Select the end time of the backup.
- 3) AVAILABLE SIZE:
Display the available capacity in the inserted USB flash drive.
- 4) CHANNEL:
Select channels by pressing “ENTER” button to change the symbol in front of the channel number.
Symbol “X” means that this channel is not selected to backup.
Symbol “●” means that this channel is selected to backup.
- 5) HDD NUM:
Show the current HDD as Master HDD.
- 6) BACKUP TO USB:
Press “ENTER” to start copying the chosen file to the USB flash drive.
- 7) Audio Backup:
For audio 1 backup, please choose CH1.
For audio 2 backup, please choose CH2.

NOTE:

- ① Please use PC to format the USB flash drive as "FAT 32".
- ② If the USB flash drive is not supported by the DVR, the “USB ERROR” message will be shown on the screen.
- ③ We recommend to clear all the files in the USB flash drive before you backup files in your USB flash drive.
- ④ The backup file can be played directly in your PC via the supplied licensed AP, or via other media players (Ex: Windows Media Player or RealPlayer) after the file is converted to “AVI” format. For detailed AP playback, please refer to P.35.

● For Model 1

Move the cursor to the “BACKUP”, and press “ENTER”, then the screen will show the following options.

BACKUP
USB BACKUP DISK BACKUP

Select “DISK BACKUP” and then press “Enter”.

DISK BACKUP				
START TIME	2006-05-12 16 : 00 : 00			
END TIME	2006-05-12 21 : 00 : 00			
AVAILABLE SIZE	4083 MB			
CHANNEL	● 01	● 02	X 03	X 04
	X 05	X 06	X 07	X 08
	X 09	X 10	X 11	X 12
	X 13	X 14	X 15	X 16
HDD NUM	MASTER			
BACKUP TO DISK	START			

- 1) Press “▲” buttons to open the CD Writer.
Put the CD into the CD Writer, and press “▲” buttons again to close.
- 2) Go to “DISK BACKUP” menu and set the start time, end time, channels and HDD number.
Note:
Select channels by pressing “ENTER” button to change the symbol in front of the channel number.
Symbol “X” means that this channel is not selected.
Symbol “●” means that this channel is selected.
- 3) After setting up the backup information,
move the cursor to “START”, and press “ENTER”.
While the files are backup to CD, users will see the backup completed percentage on the screen.
- 4) After backup files to CD, “DISK BURN FINISH” will prompt on the screen.
Press “▲” to take out the CD from CD Writer.
- 5) Put CD into the CD-ROM drive of PC.
(O/S system: Windows XP, and Windows2000).
And then double click the file → Convert the file
→ Play the backup file at PC Side.

NOTE:

1. The maximum number of backup files in the CD is 41.
2. The backup file can be played directly in your PC via the supplied licensed AP, or via other media players (Ex: Windows Media Player or RealPlayer) after the file is converted to “AVI” format.

4.14 ADVANCE MENU __ HDD INFO

You can get the capacity information for the connected HDD.

HDD INFO			
HDD NUM	HDD SIZE	HDD NUM	HDD SIZE
MASTER-1	400.000	SLAVE-1	NO HDD
MASTER-2	NO HDD	SLAVE-2	NO HDD
EXT001	NO HDD	EXT 002	NO HDD
EXT003	NO HDD	EXT 004	NO HDD
EXT005	NO HDD	EXT 006	NO HDD
EXT007	NO HDD	EXT 008	NO HDD
EXT009	NO HDD	EXT 010	NO HDD
EXT011	NO HDD	EXT 012	NO HDD

4.15 ADVANCE MENU __ EVENT LOG

You can get all the information (event type, time, and channel) on the event list, including video loss list, net list and other lists (such as power on / off, key unlock, reset to default). Select the event list you want to see and press "ENTER".

EVENT LOG	
VLOSS	LIST
NET	LIST
SYSTEM	LOG
OTHERS	
CLEAR	ALL

- 1) VLOSS LIST:
Show the information of the video loss time.
- 2) NET LIST:
Show the information of the net login time.
- 3) SYSTEM LOG:
Show the error code for system errors.
For the meaning of each error code, please see "[6.1 FAQ](#)" at P.48.
- 4) OTHERS:
Show the information of "power on / off", "unlock" and "reset to default" time.
- 5) CLEAR ALL:
Clear all event log lists.

5.1 SEARCH

Press “**SEARCH**” button on the front panel of the DVR to enter the search mode. Then the screen will show the following options.

SEARCH	
HDD-MASTER-1	
FULL	LIST
RECORD	LIST
SYSTEM	LIST
ALARM	LIST
MOTION	LIST
EVENT	SEARCH
TIME	SEARCH

- 1) HDD:
HDD-Master-1.
- 2) FULL LIST:
Show the time list for all types of the recorded files. The capital letters stand for the following: R: RECORD / S: SYSTEM / A: ALARM / MS: MOTION / T: TIMER.
- 3) RECORD LIST:
List the time of manual recorded files.
- 4) SYSTEM LIST:
List the time of system recorded files.
Under the manual recording mode, the DVR system will save one recorded file every one hour.
- 5) ALARM LIST:
List the time of alarm trigger recorded files.
- 6) MOTION LIST:
List the time of motion trigger recorded files.
- 7) EVENT SEARCH:
Search the recorded files by the specific time period (YEAR / MONTH / DAY / HOUR / MIN), channel, HDD, and event type (motion / alarm triggered recording).
When you playback the recorded videos, they will be played with the fast speed.
- 8) TIME SEARCH:
Search the recorded files by the specific time period (YEAR / MONTH / DAY / HOUR / MIN).





NOTE:

Move the cursor to the specific recorded file and press “ENTER” to play the video. Press stop “■” button to return to the live display.

5.2 KEY LOCK

- 1) Key Lock On:
 - ① Press “MENU” + “ENTER” buttons on the DVR front panel to lock keys.
 - ② Auto key lock: refer to “Section 4.11 ADVANCE MENU_SYSTEM”.
- 2) Key Lock Off:
Enter the password to exit Key Lock mode.
- 3) Password:
For the password setting, please refer to “4) PASSWORD” in “Section 4.11 ADVANCE MENU_SYSTEM” at P.23.

5.3 SWITCH THE N/P SYSTEM

- 1) Press “ “ or “Power” button on the DVR front panel to shutdown. Then, press and hold “▶” first, and press “ “ or “Power” to switch to PAL system.
(Press the buttons until the monitor shows video images.)
- 2) Press “ “ or “Power” button on the DVR front panel to shutdown . Then, press and hold “◀” first, and press “ “ or “Power” to switch to NTSC system.
(Press the buttons until the monitor shows video images.)


5.4 USB UPGRADE

This USB upgrade function is only for Model 1, 2 & 4.
Model 3 only supports upgrade from AP side. Please refer to P.31.

Users can use USB to upgrade.

Please format the USB memory device as FAT 32 format first.


- 1) Get the upgrade files from your distributor.
- 2) Save the upgrade files in your USB device (Do not change the file name).
- 3) Go to "MAIN MENU – SYSTEM - UPGRADE", and press "ENTER".
- 4) Select "YES", and press "ENTER" again to confirm upgrade.

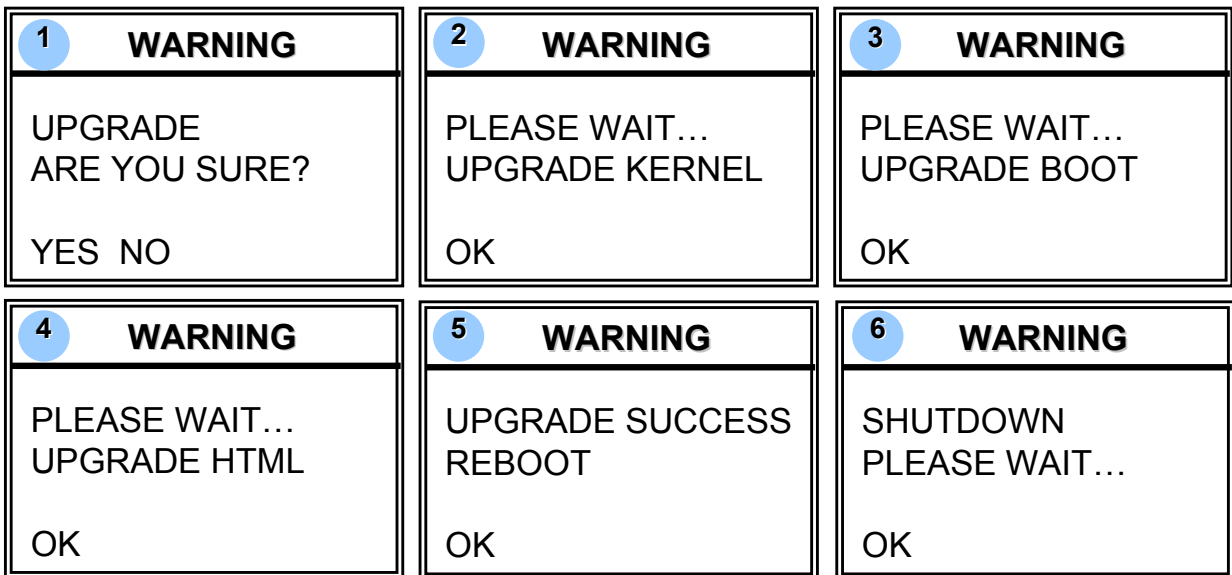

NOTE:

- ① Please use PC to format the USB flash drive as "FAT 32".
- ② If the USB flash drive can't be detected by the DVR, the "USB ERROR" message will be shown on the screen.

5.5 LICENSED SOFTWARE AP

- 1) Install the Software:
 - ① Place the attached CD into one CD-ROM drive and install application programs into PC (Including AP and JAVA program).
 - ② After setup, users will see "  " icon on the desktop.

NOTE:


For the latest version of the software AP, please refer to your distributor, or refer to "Section 5.6 OPERATION VIA IE BROWSER".

2) AP Basic Operation:

① Connect your DVR to PC via RJ45 network line.

② LAN Setting :

The default DVR IP is “192.168.1.10”, and default “username” and “password” are both “admin”. Users should set PC’s IP address as “IP:192.168.1.XXX” (1~255, except 10) in order to make the PC and DVR under the same domain.

③ Double click  to enter the login page. Key in IP (192.168.1.10), your username (admin), password (admin) and port (80) in the login page. After connecting to the DVR with local LAN, users could modify the network settings in the DVR or in “SYSTEM CONFIG” menu of the licensed software AP.


④ Network Type ~ Static IP :

Set the network information in the DVR menu (Section 4.12) or in “SYSTEM CONFIG” menu of the licensed software AP (P.35).

Network Type ~ Dynamic IP (DHCP and PPPoE) :

Set the Network information in “SYSTEM CONFIG” menu of the licensed software AP.

For detailed DHCP and PPPoE settings, please refer to P.35 and P.36.

⑤ After setting up the network information, double click  to enter the login page. Key in “Username”, “ Password”, “IP” (Static IP) or “Host name” (Dynamic IP) as well as “Port”. And then click the green button to connect.

⑥ LOGIN AP Icon Explanation



Address Book: Press this button to add a new IP into the IP Address Book or choose any preset IP address to access the software AP.



Copy: Press this button to copy all the software installation files so users could keep all the settings of the video web server for next software installation on other PCs.



Search: Search available DVR IP addresses in the local area network and modify the network setting of the DVR.



Upgrade Firmware: Press this button to upgrade DVR firmware or OSD language files. The provided firmware and OSD files should be saved at PC first.




Player: Press this button to access and play the recorded files that are saved in your PC.

NOTE: The version of the licensed software will be shown on the login page.


⑦ AP Control Panel

Digital Device Control Panel ~ 4 CH DVR

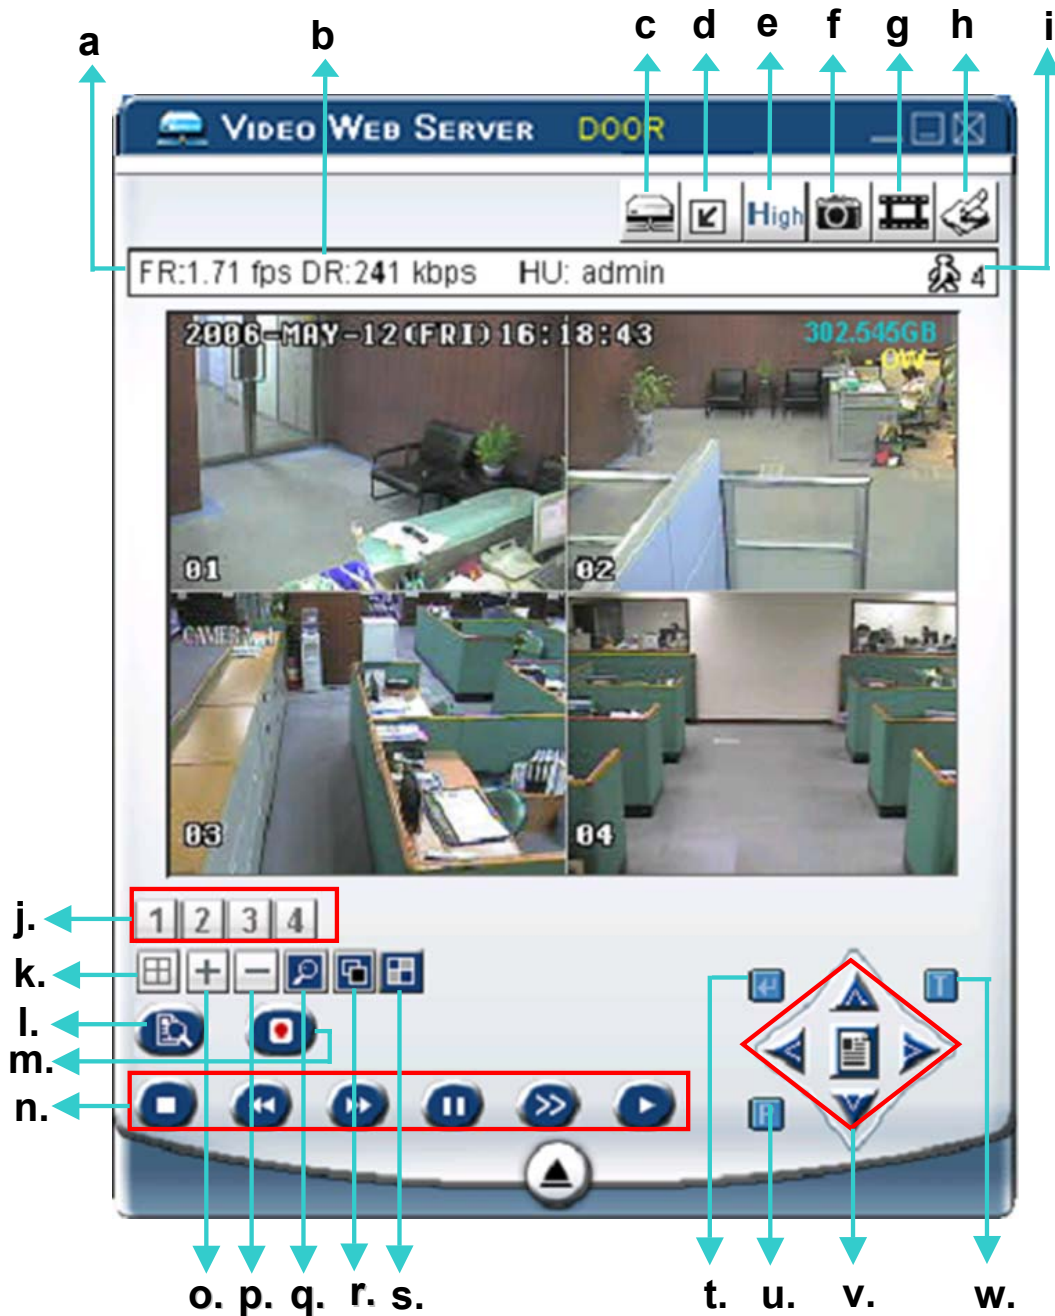


- a. Image Transfer Rate Per Second
- b. Data Transfer Rate
- c. Connect / Disconnect
- d. Resolution:
 NTSC: 320 × 228 ; 640 × 456
 PAL: 320 × 276 ; 640 × 552
- e. Image Quality (High, Medium, Low)
- f. Snapshot: Press this button to take a snapshot of the image that will be saved in the designated destination you set in "SYSTEM CONFIG - File Path - Snapshot Path".

- g. Record: press this button to start recording, and press this button again to stop recording. The recorded files will be saved to the designated path on the PC. Each recorded file can be up to 18,000 frames. When the recorded file is full, the new recorded file will be saved as the second file.
If the HDD space is less than 200MB, the program will stop recording.
- h. System Config: press this button to enter the setting page of the software AP.
- i. Number of Online Users
- j. CH 1 ~ 4
- k. 4 Channel Display
- l. Record
- m. Search
- n. Stop / Fast Rewind / Fast Forward / Pause / Slow Playback / Play
- o. +: for changing system settings and switching channels
- p. -: for changing system settings and switching channels
- q. Digital Zoom: digital zoom in/out
- r. Set: Press this button to change the position of the channel display.
Press “▲▼◀▶” to select the channel that you would like to change.
Press “+” or “-” to select the channel that you would like to show.
Press “Enter” button to confirm the setting.
- s. Sequence: Press this button to enter the call monitor function and press again to exit from the call monitor mode. When any motion is detected, the monitor will switch to the channel which is motion-triggered.
- t. Enter: for confirming the system settings or entering your selection.
- u. PTZ Control On / Off:
When the PTZ control is turned on, users could select the PTZ device, and press “OK” button to enter the PTZ control AP screen. (Press “ESC” to exit from the PTZ control AP screen and return to the DVR control AP screen)

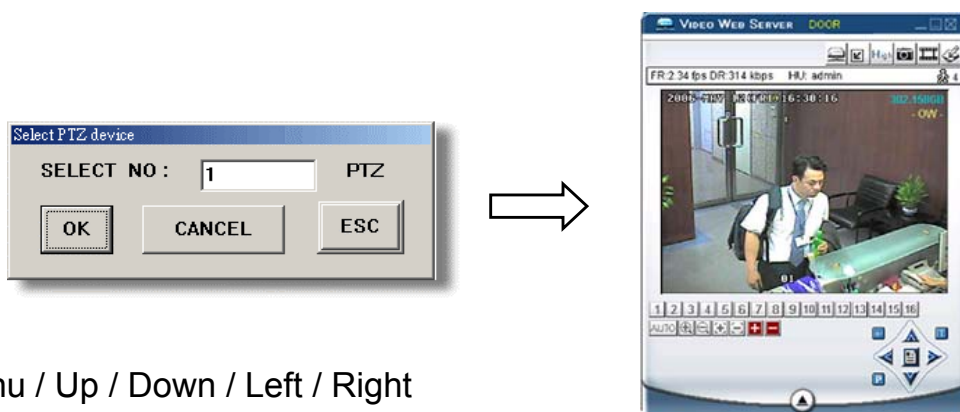

- v. Menu / Up / Down / Left / Right
- w. Turbo ON/ OFF:
To speed up menu selection or the control of the PTZ camera under software AP, users could activate "Turbo" function by clicking this button. Users are allowed to change the turbo steps from 1 to 10.
Ex: If users activate the TURBO function and set the value of the turbo step as 3, then when users press one of the button up/down/left/right, one mouse click will function as clicking 3 times.

Digital Device Control Panel ~ PTZ

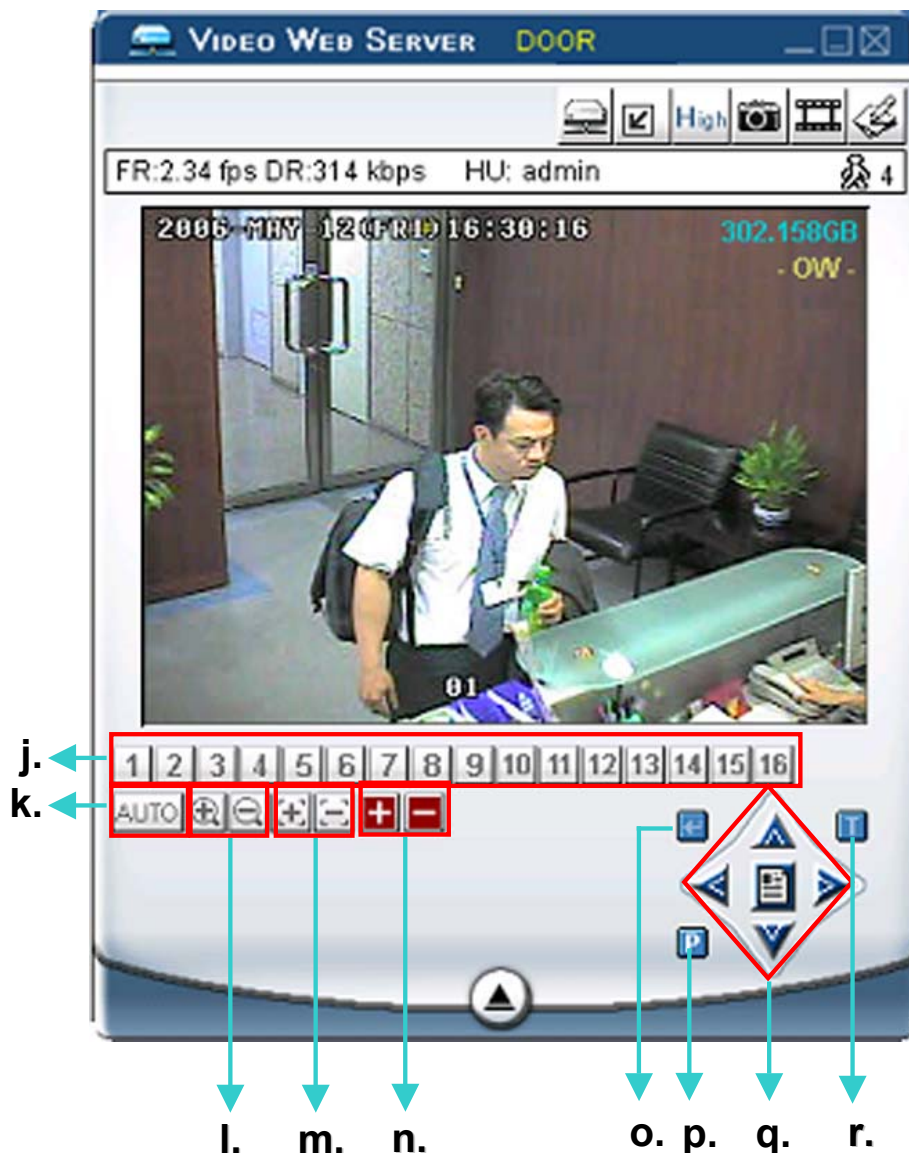

- j. Preset 1 ~ 16
- k. AUTO
- l. Zoom Tele Zoom Wide
- m. Focus Near Focus Far
- n. Max Zoom In Max Zoom Out
- o. Enter
- p. PTZ Control On / Off:
When the PTZ control mode is turned on, users could select the PTZ device and press "OK" button to enter the PTZ control AP screen. (Press "ESC" to exit from the PTZ control AP screen and return to the DVR control AP screen)
- q. Menu / Up / Down / Left / Right
- r. Turbo:
To speed up menu selection or the control of the PTZ camera under the software AP, users could activate "Turbo" function by clicking this button. Users are allowed to change the turbo steps from 1 to 10.
Ex: If users activate the TURBO function and set the value of the turbo step as 3, then when users press one of the button up/down/left/right, one mouse click will function as clicking 3 times.

⑧ Playback Operation

AP Playback Window :



AP Config. Setting Box :



One click to activate



A B

C

D

E

F

A. Playback Information :

Display information such as “Date”, “Time”, “Resolution”, “Rewind / Forward Speed”, “Status” and “Functions”, etc.

B. Time Progress Bar :

Show the playback progress status.

C. Functions :

- **De-interlace:** Reduce the vibration of the paused picture.
- **De-blocking:** Reduce the video mosaic phenomenon.
- **OSD:** Display the OSD of the AP playback window.
- **AVI conversion:** Convert the entire recorded file to the AVI format.
- **Config. Setting:** Enter the AP config. setting box, and set the file path, text color and text color of progress status.
 - * Mute: Play back the video only (without audio).
 - * AV Sync.: Play back with the audio and video synchronously.
- **Watermark:** Proof the authenticity of the backup video.
- **Open Previous File:** Open the previous backup video.
- **Open Next File:** Open the next backup video.


D. Playback Control Buttons :

Play / Stop / Pause / Fast Rewind / Fast Forward

E. Snapshot :

Press this button to take a snapshot of the current image which will be saved in the designated destination.

F. Close the Player

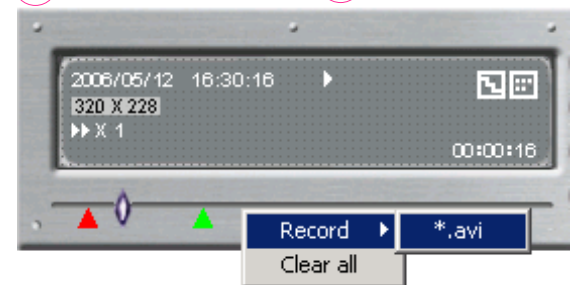

To snap a video clip, right click the mouse to make a starting point (red) and click one more time to make a ending point. Then right click to convert to the AVI format.

Note:

- When users pause the playback picture, press “” button to go to the previous frame, or press “” button to go to the next frame.
- In the playback mode of the software AP, users could press “” button to check the authenticity of the **BACKUP VIDEO**. If the **BACKUP VIDEO** had been altered, the video image will turn to light red and the playback will be paused.

Note:

- When users use remote AP recording, the watermark function is not supported.

3) AP Advanced Setting:



- ❑ Press "System Config"  button to enter the system setting page.

Network

The network configuration allows the DVR to connect to an Ethernet or dial-up network.

① Static IP:

Enter the "server IP", "gateway", "net mask" and "web port", and then press "APPLY" to confirm.

② PPPoE:

Enter the "username" and "password" provided by your ISP (Internet Service Provider). Then, set DDNS settings (see P.37).

③ DHCP:

This DHCP function needs to be supported by a router or a cable modem network with DHCP services. Choose the DHCP IP type. Then, set DDNS settings (see P.37).

Note:

PPPoE and DHCP network connection types are required to apply DDNS services **FIRST** to get a "Hostname" to correspond to the dynamic IP address.




Please refer to P.37 for details.

Note:

Some router brands may need to restart the DVR to get the IP address.


④ Web Port:

The DVR can be viewed over the network with the software AP or a web browser. Typically, the TCP port used by HTTP is 80. However in some cases, it is better to change this port number for added flexibility or security. The valid number ranges from 1 to 9999.

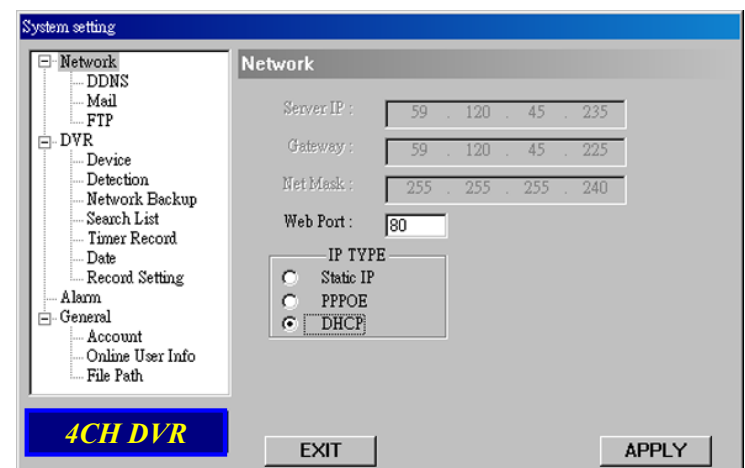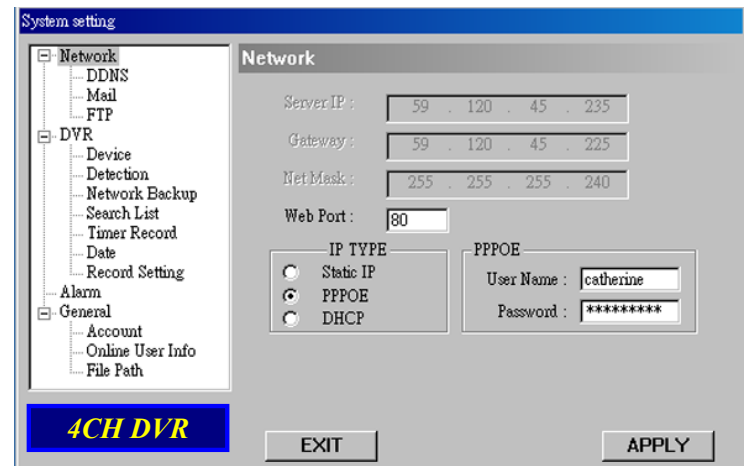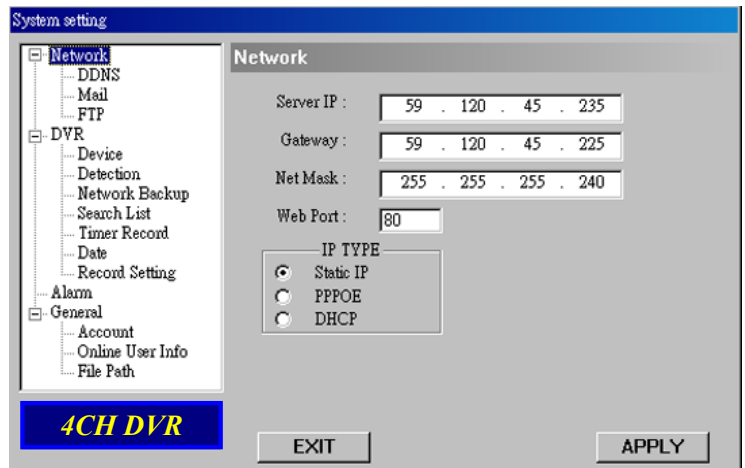

DDNS


- ① DDNS is a service for transforming the dynamic IP corresponding to a specific "Hostname".
- ② **DDNS Apply:**
Go to a website which provides free DDNS services and apply a "Hostname". See the example below.
- ③ **Enable the DDNS function:**
Enter your DDNS user name into "User Name" column.
Enter your DDNS password into "Password" column.
Enter your host name into "Domain" column.
Choose one DDNS system name from "System Name" column.
After setting, press "APPLY" to confirm.

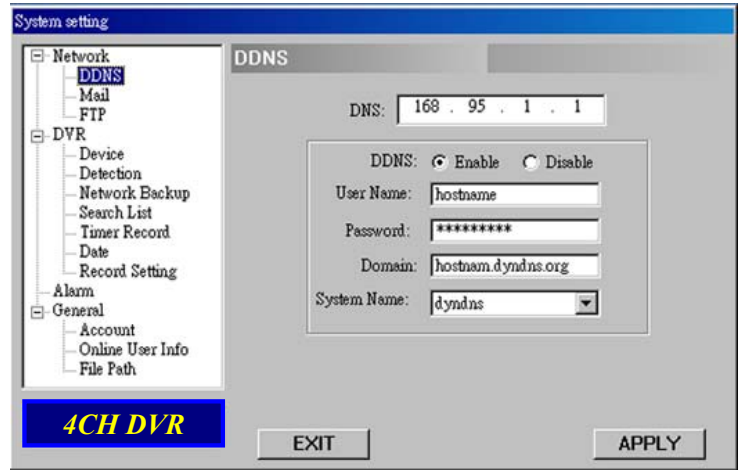

- ④ **Auto:**
When using DHCP network connection, the "AUTO" check box will appear on this window. The system will automatically get DNS information from the Internet if this check box is selected.

DDNS APPLY EXAMPLE:

- ❑ Go to a website which provide free DDNS services.
For example, "http://www.dyndns.org".
- ❑ Create an account in DynDNS.
- ❑ After creating one account, users will receive an confirmation e-mail within a few minutes.
To complete the registration, please follow the instructions received.
Users must complete these steps within 48 hours to complete the registration.
If the confirmation e-mail was not received within an hour, request "password reset" (http://www.dyndns.org/account/resetpass/).
- ❑ Use the DDNS username and password to login the DynDNS.
- ❑ **Create Hostname:**
Login → "Account" → "My Service" → "Add Host Services" → "Add Dynamic DNS Host" → Enter and choose the hostname → Click on "Add Host" → DDNS Hostname created.

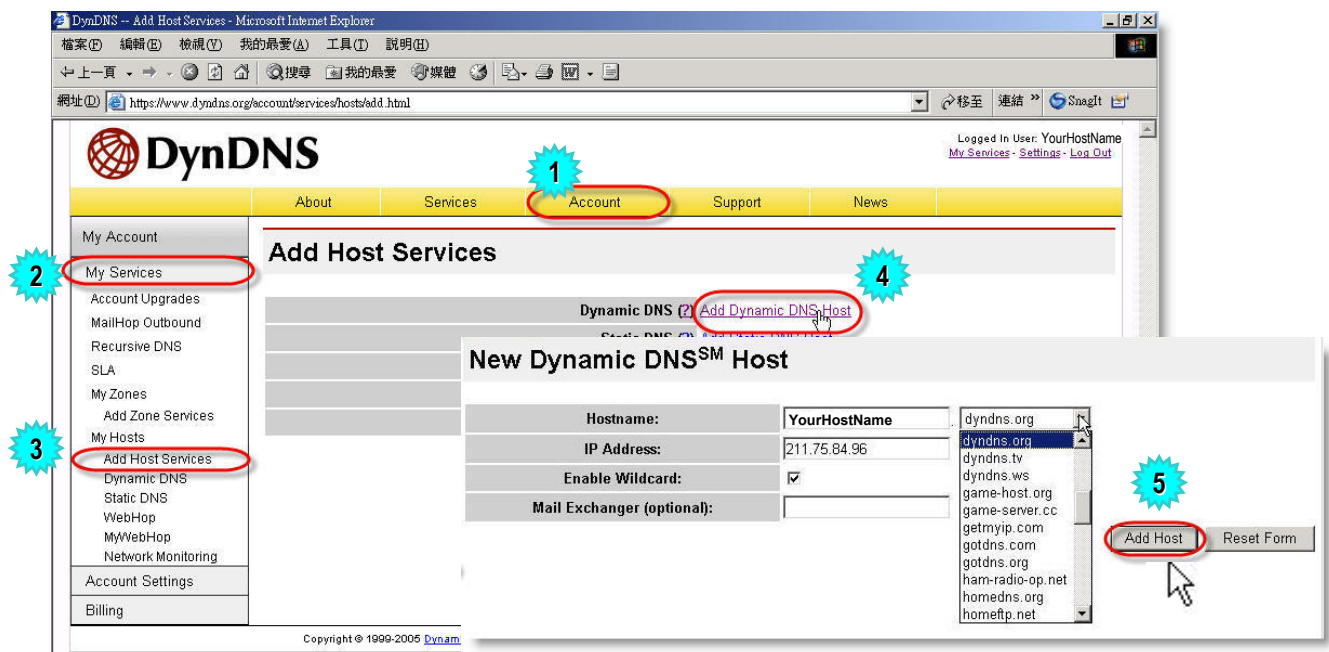

Mail

- ① When the recording is triggered by an alarm or a motion, a video copy file can be captured. The DVR will send an e-mail notification to the assigned recipients (up to 5 recipients).


*****Note***:**

To activate the e-mail notification function, please enable the function of e-mail notification in the “**Alarm**” setting first (page 43).

- ② Add the recipients’ email accounts in “**Mail Account**” column.

For detailed information (SMTP server, username and password), please get from your e-mail system supplier.

- ③ Please type the entire email address in the “**Mail from**” column to ensure emails will not be blocked by SMTP.
- ④ In some cases, mail servers require to verify password. Please enter the “**user name**” and “**password**”.
- ⑤ After finishing the settings, press “**APPLY**” to confirm.

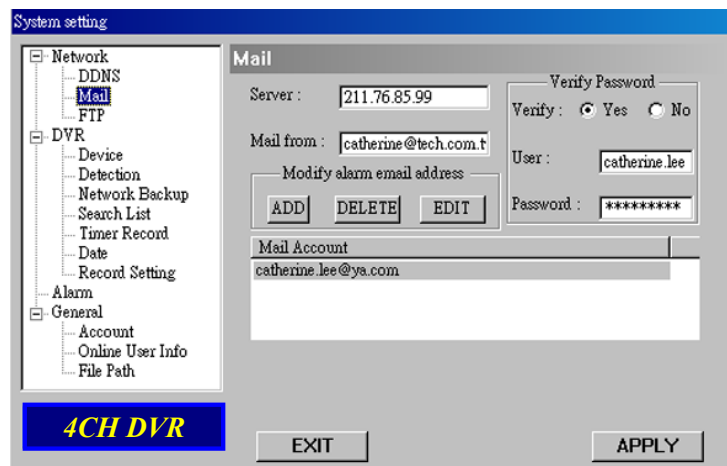

FTP


- ① When the recording is triggered by an alarm or a motion, a video copy file can be captured. And the DVR will upload the captured images to the assigned FTP site.

- ② Enter the detailed FTP information.

*****Note***:**


To activate the FTP notification function, please enable the function of FTP notification in the “**Alarm**” setting first.

- ① After setting, press “**APPLY**” to confirm.

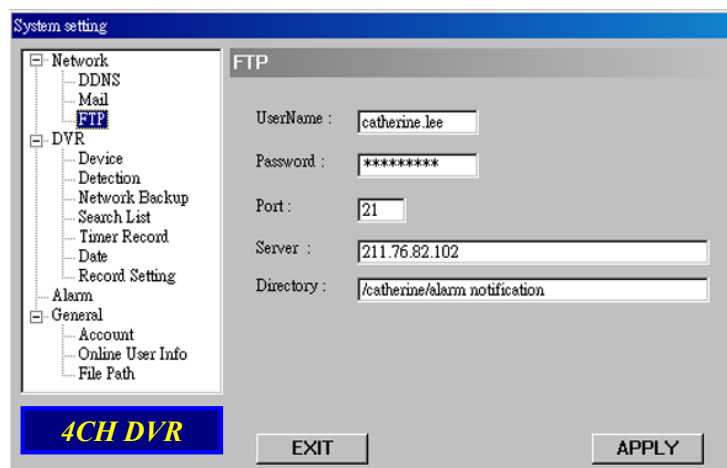


DVR – Camera Setting

- ① Each camera channel can be adjusted independently.
- ② Select the desired camera channel. Press “Edit” to enter the setting box.
- ③ **Title:**
Enter the camera channel name up to 6 characters.
- ④ **Adjustment:**
Adjust the BR (brightness) / CT (contrast) / SU (saturation) / HU (hue) / REC (recording) of the camera.
- ⑤ After setting, press “OK” and then press “APPLY” to confirm.

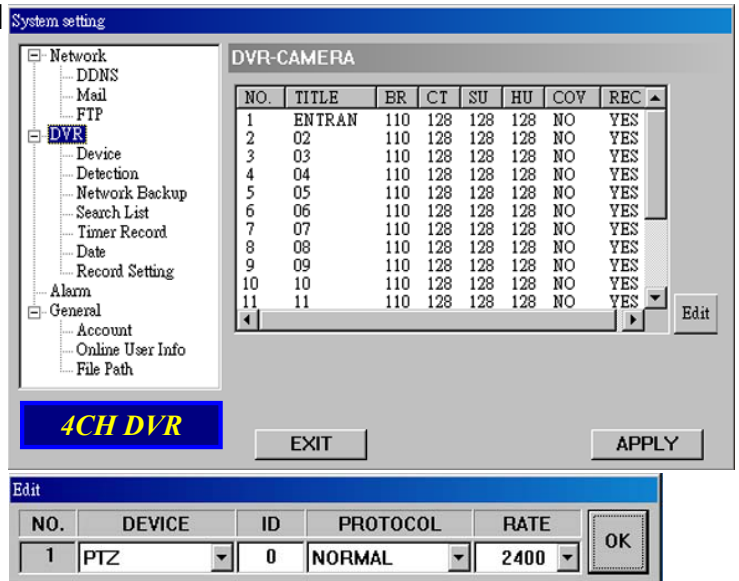



Device


- ① Select the desired channel of the installed external device. Press “Edit” to enter the setting box.
- ② **Device Type:**
Choose either general camera or PTZ camera.
- ③ **ID No. :**
Set the ID number (0 ~ 255) of the installed external PTZ device.
- ④ **Protocol Type :**
Choose “NORMAL” protocol for our own brand camera.
Choose “P-D” protocol for PELCO-D protocol camera.
- ⑤ **Baud Rate :**
Set the baud rate of each channel (2400, 4800, 9600, 19200, 38400, 57600, 115200).
- ⑥ After setting, press “OK” and then press “APPLY” to confirm.

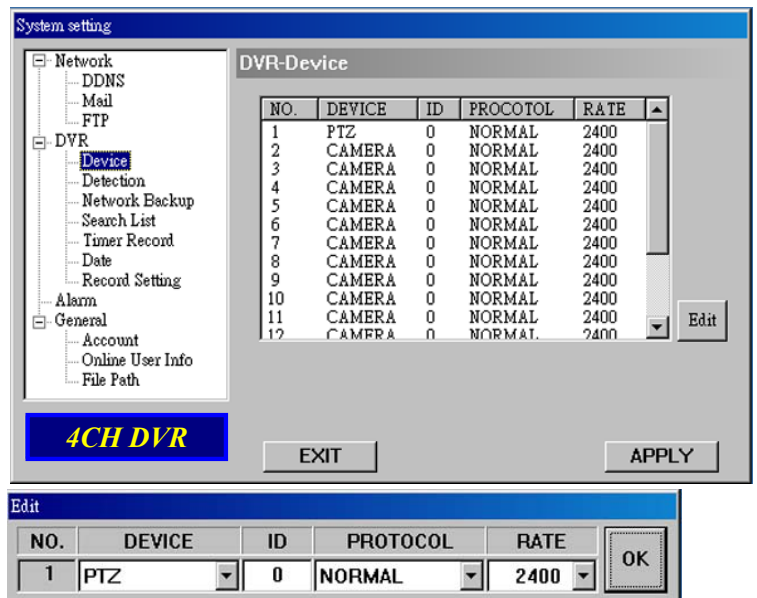

Detection

- ① Select the desired channel, and press “Edit” to enter the motion detection sensitivity and area setting box.
- ② **Motion Detection Sensitivity:**
Set the detection sensitivity in 4 different adjustable factors.
LS: The sensitivity of comparing two different images. The smaller the value, the higher sensitivity for the motion detection.
SS: The sensitivity towards the size of the triggered object on the screen (the number of motion detection grids). The smaller the value, the higher sensitivity for the motion detection.
TS: The sensitivity towards how long the object stays in the detection area to get triggered. The smaller the value, the higher sensitivity for the motion detection.
RE: The value of RE is a reference for the detection. The bigger the value, the higher sensitivity for the motion detection.
- ③ **Alarm:**
Select LOW / HIGH for the alarm polarity.
- ④ **Motion Detection Area:**
By clicking the area with your mouse, one can choose the motion area to be detected. The under detected area is transparent while the undetected area is in pink color.
*Click “**Select All**” to activate the detection area as the full area.
*Click “**Clear All**” to clean the previously selected detection area.
After setting, press “OK” and then press “APPLY” to confirm.

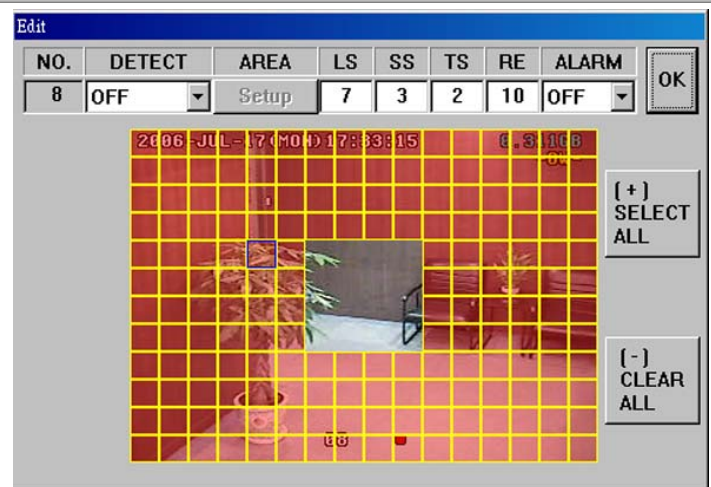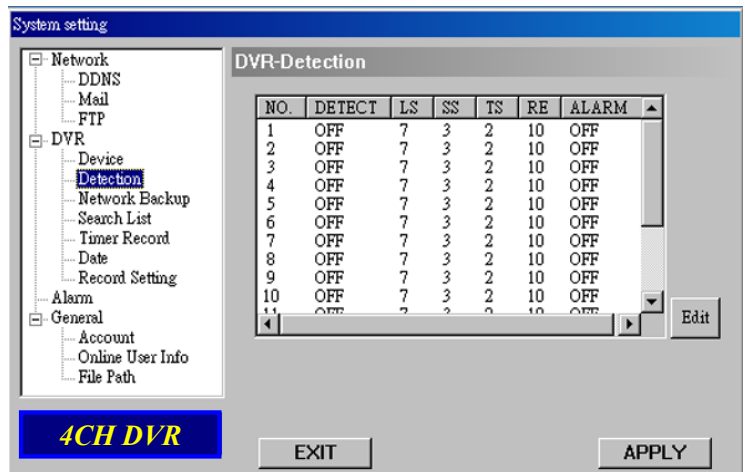

Note: Enable the motion detection function. When the motion is triggered, a “” icon will be shown on the screen. And the software AP will start recording automatically.

Network Backup

You can backup the recorded data from the DVR directly to your PC and CD via the network. The backup file can be played directly in your PC via the supplied licensed AP, or via other media players (Ex: Windows Media Player or RealPlayer) after the file is converted to “AVI” format.


NOTE: For CD backup, please install “NERO” CD burning program to your PC first.

1. Enter the backup information:

If you want to make a backup to a CD, please check “Copy to CD”.

If you want to view the backup image while the backup is processing, please check “Dynamic Download”.

2. Press "Start" button to proceed the backup process.

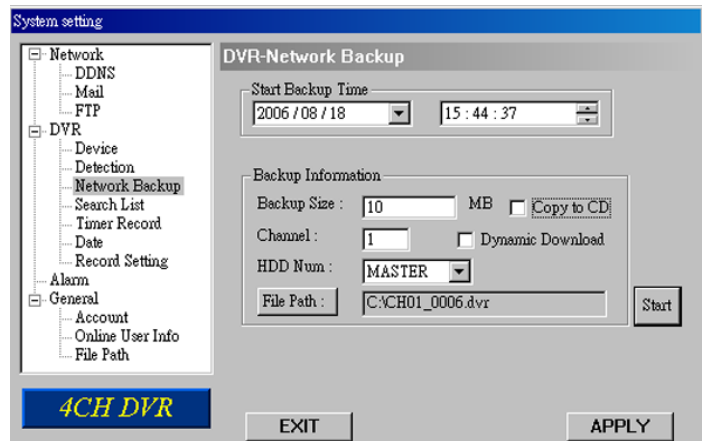




Making backup to your PC:

After pressing “Start”, the backup will be proceeded and a status bar will be displayed. “DVR Network Backup” pop-up window will show the message “Download process is finished” when the backup is succeeded.

Press “PLAY” button to directly convert and play the file, or “Exit” to quit.

To convert the backup file later, please find the file in the designated file path and double-click it twice for AVI conversion and file playback.

You will see the player and video window as shown on the right side. For AP playback details, please see “Playback Operation” at P.35.

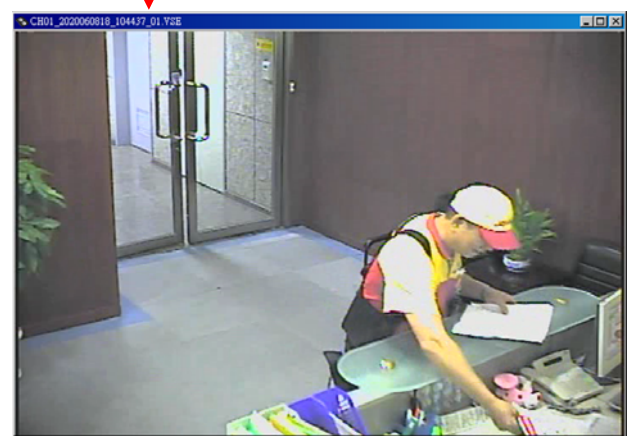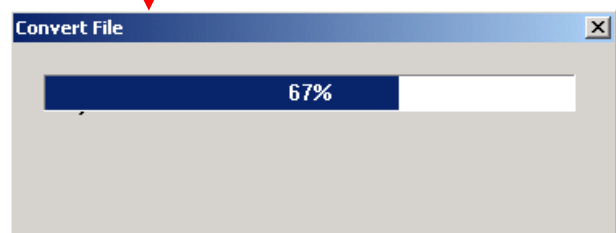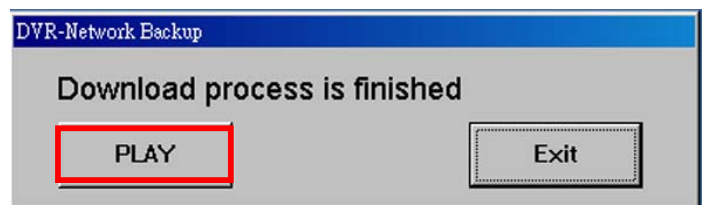

Making backup to a CD:

After pressing “Start”, “Write CD Setting” pop-up window will show.



- Choose “Close Disc” when you don’t want to write any more data to this CD after this burning;
- Choose “Append Player” when you don’t have any available player on your PC to open the backup file.

Press “OK” to start making a CD backup, or press “CANCEL WRITING CD” to only make a backup file to your PC.

When CD writing is processing, “DVR-Network Backup” window will show the message “Writing cd ...” and a status bar will show the writing status.

When CD writing is completed, the CD will be ejected, and “DVR Network Backup” pop-up window will show the message “Download process is finished”. Press “PLAY” button to directly convert and play the file, or “Exit” to quit.

For AP playback details, please see “Playback Operation” at P.35.

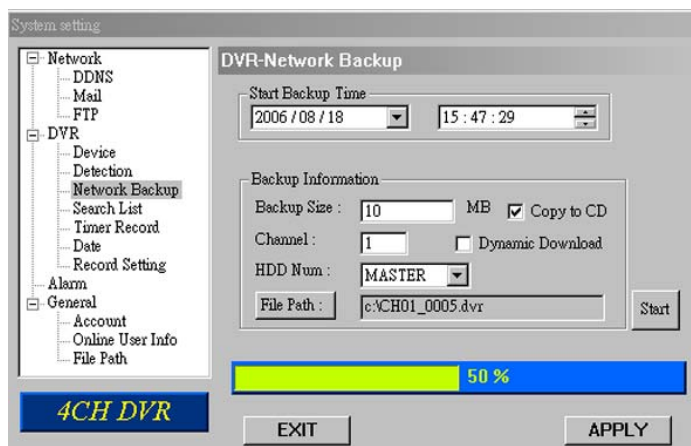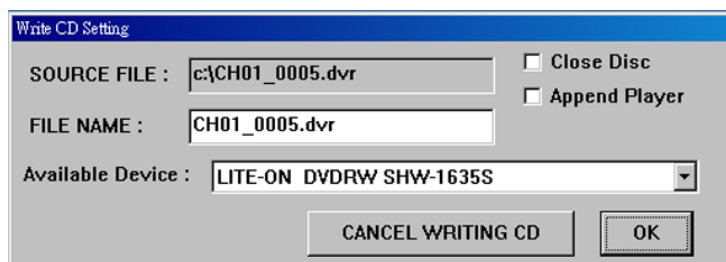

A. Playback Information

B. Time Progress Bar

C. Functions :

- (1) De-interlace
- (2) De-blocking
- (3) OSD
- (4) AVI Conversion
- (5) Config. Setting
- (6) Watermark
- (7) Open Previous
- (8) Open Next File

D. Playback Control Buttons :

Play / Stop / Pause / Fast Rewind / Fast Forward

E. Snapshot



F. Close the Player.

NOTE:

1. During the file backup process, users can still see the live image at the same time.
2. If Model 3 and Model 4 is under CIF mode, the network backup function will save quad images no matter which channel is selected for backup.
3. The maximum size per file for Network Backup is 500MB.

Search List


- ① **HDD Number:**
Select one HDD (Master).
- ② **List Type:**
Select one list type (All/ Manual/ System/ Alarm/ Motion).
- ③ **Max List Number:**
Maximum number of the list (128)
- ④ **Download HDD List:**
Press this button to start downloading the list.

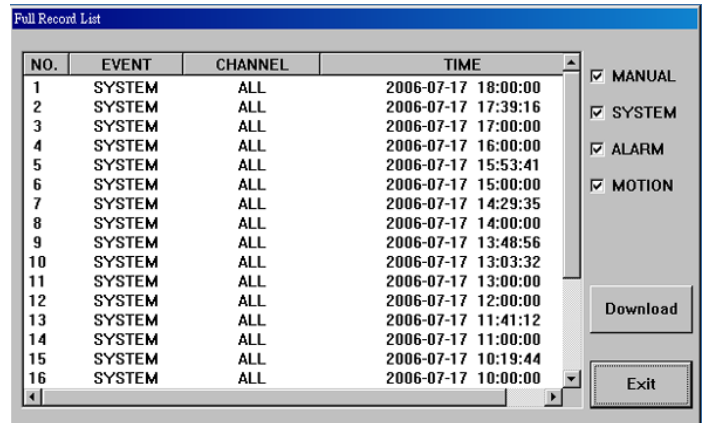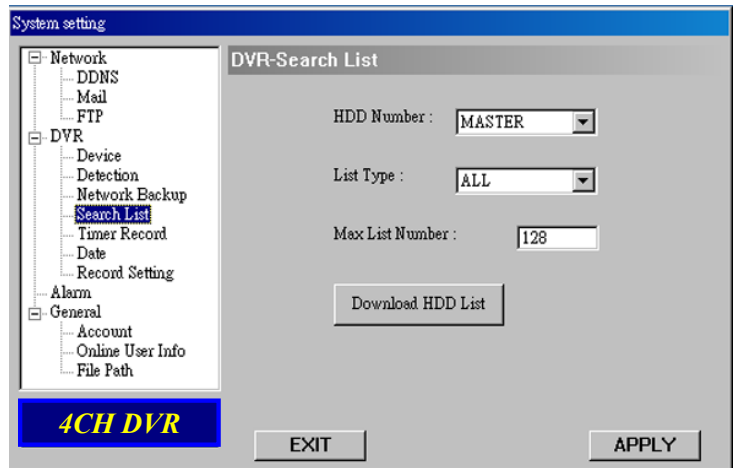

Timer Record

In this menu, you can schedule 7 different sets of time for recording.

- ① **DATE:**
Choose a day from “DATE” drop-down menu. The options are OFF, SUN, MON, TUE, WED, THU, FRI, SAT, MON-FRI, SAT-SUN and DAILY.
- ② **START:**
Enter the start time of timer recording.
- ③ **END:**
Enter the end time of timer recording.

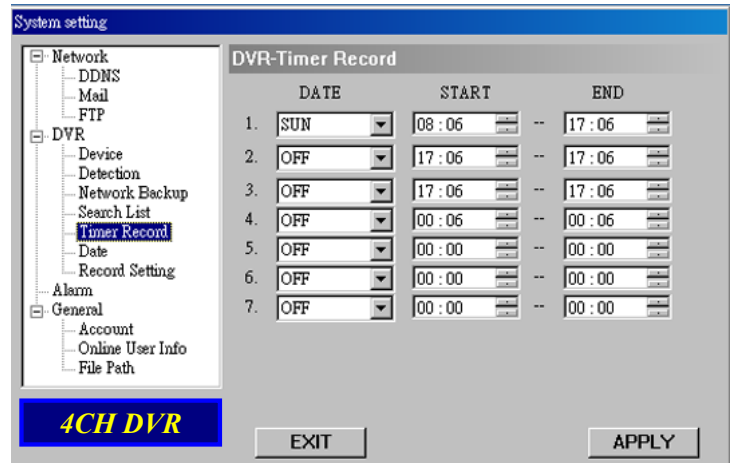

Press “APPLY” if the settings are correct; press “EXIT” to quit without saving.


Date

In this menu, you can set the date for your DVR. Please **DO NOT** change the date or time when the recording function is activated. See “**2.1 GETTING STARTED**” at P.10 for details.

① **DATE:**

Choose the current date from “DATE” drop-down menu and enter the current time.

When you click the drop-down menu, a calendar as shown below shows for you to set the current date.

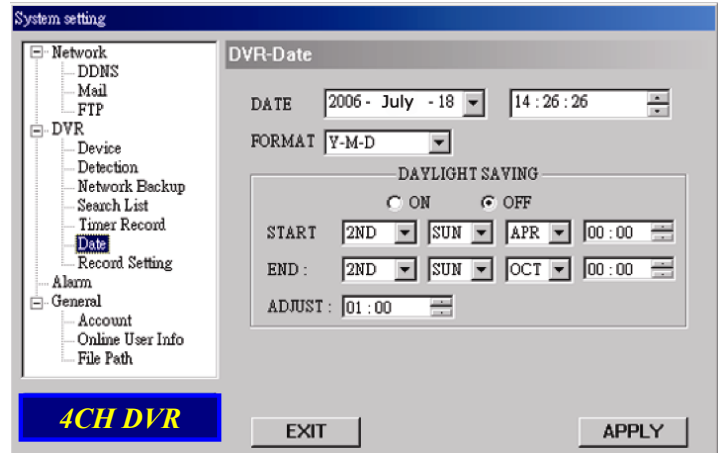

② **FORMAT:**

Choose the format for date display from the three options: Y-M-D, D-M-Y and M-D-Y.

③ **DAYLIGHT SAVING:**

Specify whether to use daylight saving time (ON / OFF) and time period (START / END), and adjust the daylight saving time in hour (ADJUST).

Record Setting

In this menu, you can set DVR record settings.

① **MANUAL RECORD:**

Specify whether to use manual recording (YES / ON) and set IPS number.

② **EVENT RECORD:**

Specify whether to use event recording (YES / ON) and set IPS number.

③ **TIMER RECORD:**


Specify whether to use timer recording (YES / ON) and set IPS number.

④ **OVER WRITE:**

Specify whether to overwrite the HDD capacity when the HDD is full (YES / NO).

⑤ **RECORD IMG SIZE:**

Choose “FRAME” or “CIF”. This selection will affect the available IPS options in the 3 recording modes described above.

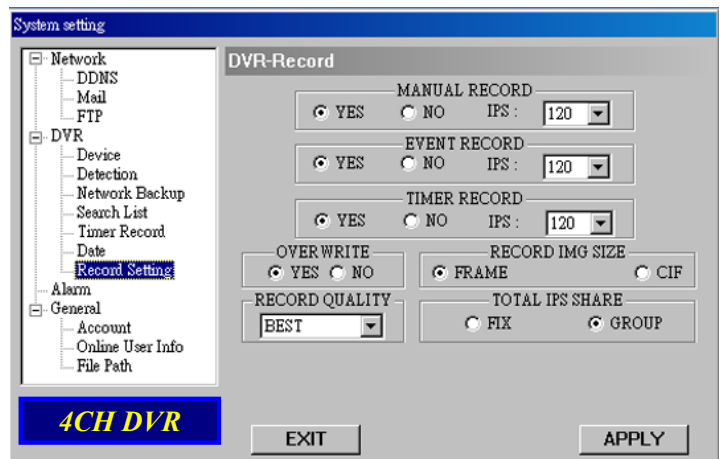

⑥ **RECORD QUALITY:**

4 options are available from the drop-down menu: BEST, HIGH, NORMAL and BASIC.

⑦ **TOTAL IPS SHARE:**


Choose the IPS share as FIX or GROUP.

NOTE:

For Model 3 & 4, the total IPS share is always “FIX”. Selecting “GROUP” here is useless.

Alarm

- ① **Alarm Trigger:**
Enable or disable Email and FTP notification function.
- ② **Alarm Method:**
Two notification methods — Email and / or FTP.
- ③ **Post Numbers:**
Set MJPEG pictures (1-10 pictures).
- ④ **Alarm Duration:**
Set the duration time of motion trigger recording (5 SEC, 10 SEC, 20 SEC, 40 SEC).
- ⑤ **Alarm Refresh:**
Clean the alarm message “🚨” which is shown on the screen.

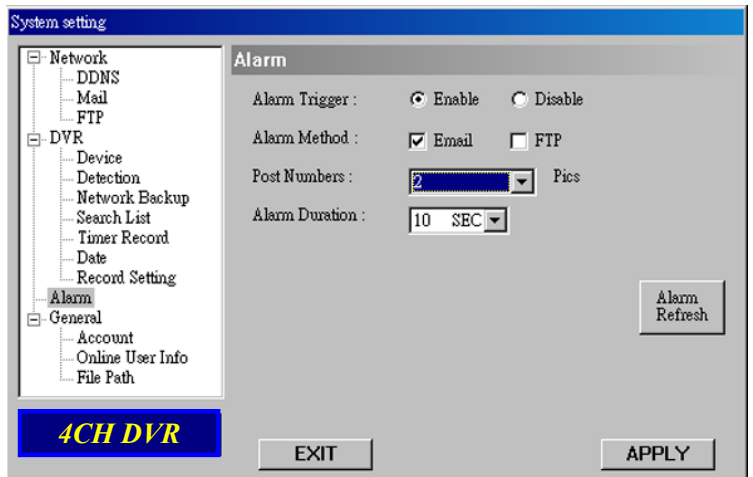

Note:

Email Notification:


MJPEG pictures will be made at your designated space set in “File Path”, plus an e-mail contained with the MJPEG pictures (1-10 pictures) to be sent to the address which is set under “Mail”.

FTP Notification:

MJPEG pictures will be made at your designated space set in “File Path”, plus a FTP file contained with the MJPEG pictures (1-10 pictures) to be sent to the address which is set under “FTP”.

General




- ① Get the information of DVR firmware version in this window.
- ② **Select “Turbo Step” (1 - 10).**
To speed up menu selection or the control of the PTZ camera under video web servers, users can activate "Turbo" function by clicking this button. Users are allowed to change the turbo steps from 1 to 10.
Ex: If the value of the turbo step is "5", it means that when users press one of the button up/down/left/right, one click is as clicking 5 times.
- ③ **MAX LOG LIST:**
Set the maximum number of log list.
- ④ **Server Log:**
Press “Server Log” button to enter the server log list window.
- ⑤ **Title:**
Name the title which will be shown on the top of the AP live viewer (up to 15 characters).

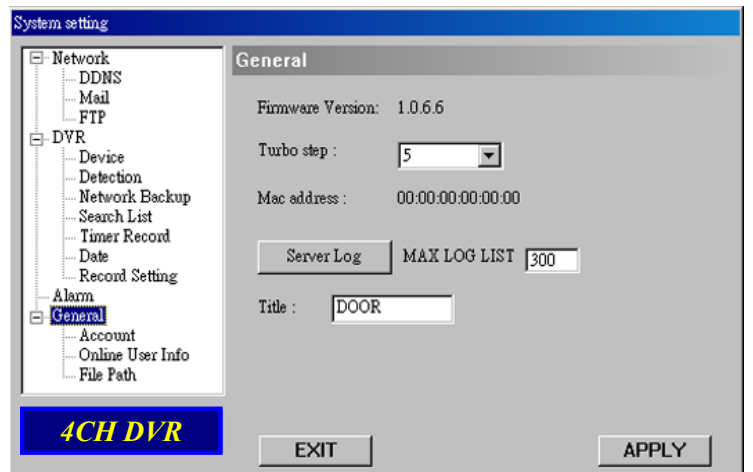

NO.	EVENT	TIME	CH	
1	REMOTE LOGIN [a...	06-03-24 15:44:34	NO	<input checked="" type="checkbox"/> POWER ON
2	REMOTE LOGIN [a...	06-03-24 15:43:54	NO	<input checked="" type="checkbox"/> VIDEO LOSS
3	REMOTE LOGIN [a...	06-03-24 15:43:00	NO	<input checked="" type="checkbox"/> REMOTE LOGIN
4	REMOTE LOGIN [a...	06-03-24 15:42:02	NO	<input checked="" type="checkbox"/> HDD FULL
5	REMOTE LOGIN [a...	06-03-24 15:41:52	NO	<input checked="" type="checkbox"/> KEY LOCK
6	REMOTE LOGIN [a...	06-03-24 15:41:37	NO	<input checked="" type="checkbox"/> KEY UNLOCK
7	REMOTE LOGIN [a...	06-03-24 15:41:27	NO	<input checked="" type="checkbox"/> RESET DEFAULT
8	REMOTE LOGIN [a...	06-03-24 15:40:41	NO	<input checked="" type="checkbox"/> EMAIL FAILED
9	REMOTE LOGIN [a...	06-03-24 15:40:22	NO	<input checked="" type="checkbox"/> FTP FAILED
10	REMOTE LOGIN [c...	06-03-24 15:22:06	NO	<input checked="" type="checkbox"/> HDD DMA ERROR
11	REMOTE LOGIN [a...	06-03-24 15:16:53	NO	<input checked="" type="checkbox"/> DDNS
12	REMOTE LOGIN [a...	06-03-24 15:16:41	NO	<input checked="" type="checkbox"/> PPPOE
13	REMOTE LOGIN [c...	06-03-24 15:16:25	NO	<input checked="" type="checkbox"/> DHCP
14	REMOTE LOGIN [a...	06-03-24 15:16:09	NO	
15	REMOTE LOGIN [a...	06-03-24 15:15:16	NO	
16	REMOTE LOGIN [a...	06-03-24 15:14:58	NO	
17	REMOTE LOGIN [a...	06-03-24 14:56:05	NO	
18	REMOTE LOGIN [c...	06-03-24 14:32:07	NO	


Account

- Set up the user's account (Max 5 accounts), password, life time, and authority level (Max 5 users on line at the same time).
- User's level:
 - SUPERVISOR** — Control all the functions ("a", "b", "c", "d", "e" and "f").
 - HIGH** — Control only "a", "b", "c", "d" and "e" functions, but cannot control "f" function.
 - NORMAL** — Control only "a", "d", and "e" functions, but cannot control "b", "c" and "f" functions.
 - GUEST** — Watch the image only. Only "a" function can be used.
- Life time** : According to different authority levels, different accounts can stay online for different time periods (1 Min, 5 Min, 10 Min, 1 Hour, 1 Day, INFINITY).

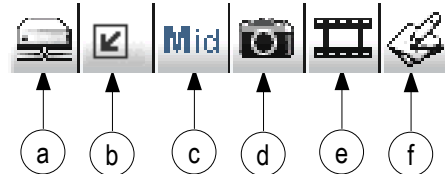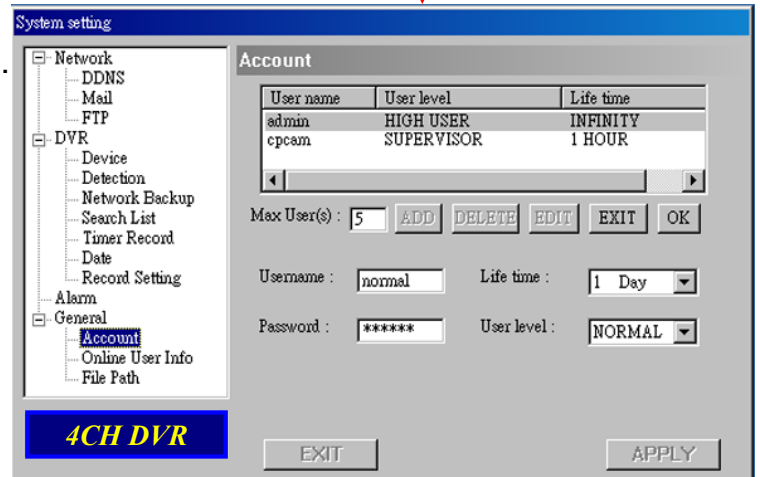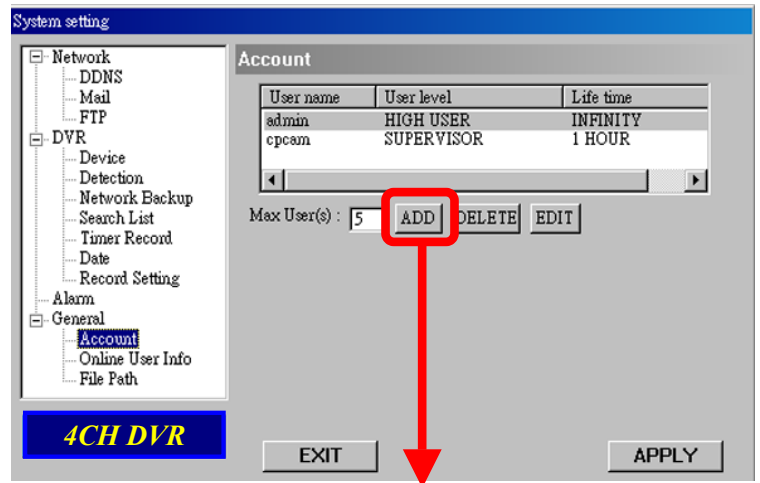


Online User Info

- Get all the current online users' information list (Name, IP Address, Authority Level, Resolution and Image Quality).

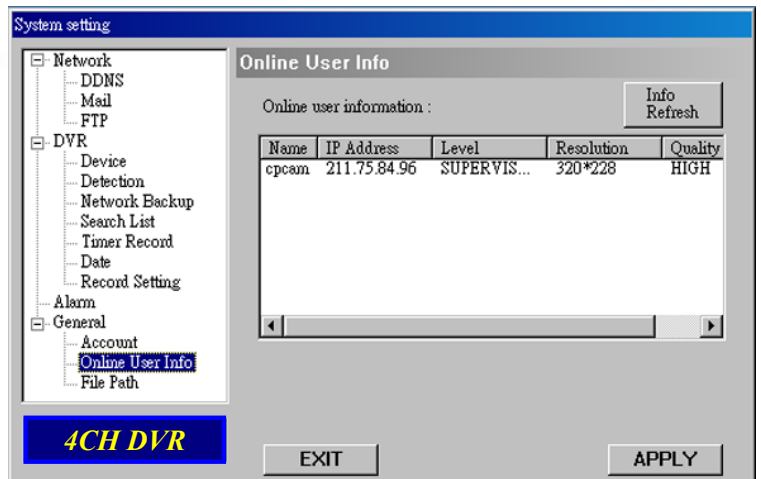

File Path

- Snapshot Path:** Assign the route for saving the snapshot picture.
- Record Path:** Assign the route for saving the manually recorded file.

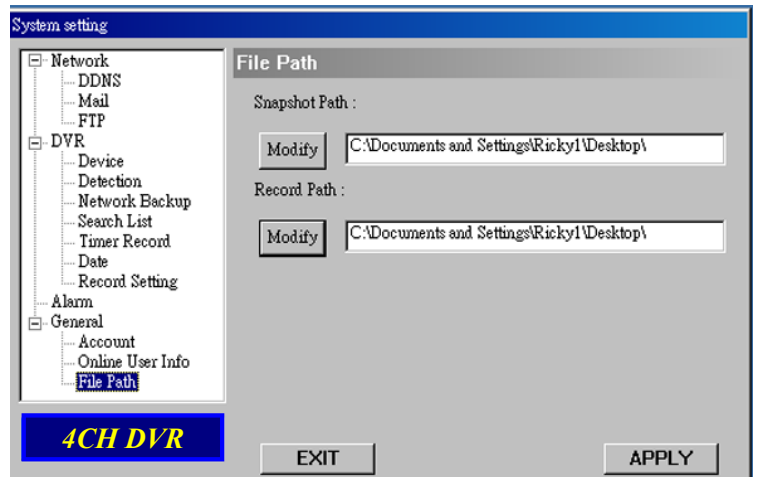

5.6 OPERATION VIA IE BROWSER

The DVR can be viewed over the network with IE web browser. Please install the licensed software AP first.

***** This function is suitable in both Windows 2000 and Windows XP *****

Step 1: Type one IP address into the URL address box and press Enter. Then you'll see the following page.

If the TCP port number is not 80, see the example below.

IP address: 60.121.46.236 ; Port number: 888

→ Key in “**http://60.121.46.236 :888**” into the URL address box and press Enter.



Download JAVA Program

- 1) Press “Download Java” button to go to JAVA website.
- 2) Select “Java Runtime Environment (JRE) 5.0 Update 8”, and press “Download”.
- 3) Press “Accept License Agreement”.
- 4) Choose “Windows offline installation” or “Windows online installation”.
- 5) Take “Windows offline installation” for an example. After downloading the setup file, run the setup file on the PC.

NOTE: Users can download the latest AP version and update the JAVA program from the website. The latest version of JAVA program is JRE 5.0 Update 8 at the time this manual goes to press.

Step 2: Key in the “username” and “password” to login

PTZ

Change Resolution

Change Image Quality

Same as the AP operation. Please refer to “Section 6.6 Licensed Software AP”.

Set the display position of the image
(LT: Upper Left; LD: Lower Left; RT: Upper Right; Lower Right)

TROUBLESHOOTING

6.1 FAQ

Please refer to the FAQ table below for easy troubleshooting. The table below describes some typical problems and also their solutions. Please check them before calling your DVR dealer.

PROBLEM	SOLUTION
No power	Check power cord connection.
	Confirm that there is power from the outlet.
Not working when pressing any button	Press any key and then enter the password to exit "Key Lock" mode.
Timer record is not working	Check if the "RECORD ENABLE" is set to "YES".
No live video	Check the camera's video cable and connections.
	Check the monitor's video cable and connections.
	Confirm the camera is power supplied.
	Check the setting of the camera lens.
No recorded video	Check if the HDD is installed and connected properly
DVR keeps rebooting	Make sure the power connector and HDD are connected closely, or change another suitable HDD.
Detect HDD fail	Change another HDD for testing.
	Change another HDD cable for testing.
	Make sure HDD "Master", "Slave" mode is correctly set.
Can't detect your USB flash drive	Change another USB flash drive to test.
Can't view the DVR images over the network with IE web browser	Update the JAVA program Update the firmware of the software AP
Can't play the recorded file on my DVR	There must be at least 8192 images of recorded data for playback to work properly. If not, your DVR will stop the playback. For example, if the IPS is set to 30, the recording time should be at least 273 seconds (8192 images / 30 IPS) for the playback to work properly.
Error Code in "SYSTEM LOG":	Meaning:
1) SYS ERR 01-YYY #define SYS_ERR_AV087_ERR 1) YYY=000 YYY=001- AV087 YYY=002- AV087 YYY=004- AV087 YYY=008- AV087 YYY=003(001+002)	Compression error Audio chip error Chip for CH1-4 error Chip for CH5-8 error Chip for CH9-12 error Chip for CH13-16 error Chips for CH1-4 & CH5-8 error, etc
2) SYS ERR 02-XXX #define SYS_ERR_AV087_BUF_FULL	Buffer is full
3) SYS ERR 03-XXX #define SYS_ERR_AV087_BUF_EMPTY	Buffer is empty
4) SYS ERR 04-XXX #define SYS_ERR_IDE_ERR	IDE interface error
5) SYS ERR 05-XXX #define SYS_ERR_SCAN_DISK	Disk scanning error
6) SYS ERR 06-XXX #define SYS_ERR_TOP_FAT_ERR	File system error
7) SYS ERR 07 (including 08, 09, etc.)-XXX #define	HDD error

APPENDIX #1 – INSTALL HDD

Carefully follow the steps to ensure correct installation.

(Model 1)

*** Note: Please set the HDD to “Master Mode” or “Single Mode” ***

- 1) Open the upper cover of the DVR:
Loosen the two screws respectively on the two sides of the upper cover.
Loosen the four screws on the back side of the upper cover.



- 2) Screw out the HDD bracket.
For the positions of the HDD bracket screws, please refer to the right figure.



- 3) Screw HDD onto the HDD bracket, two screws for each side. There are three screw holes per side on the bracket and you can choose two of them to secure the HDD. And then screw the HDD bracket back to the DVR base.



- 4) Connect the HDD to the power connector and IDE BUS (make sure to align the HDD precisely for pin connection). And then close the upper cover of the DVR and fasten all the screws you loosened in the step 1.



(Model 2, 3 & 4)

Carefully follow the steps to ensure correct installation.

*** Note: Please set the HDD to “Master Mode” or “Single Mode” ***



Fig. 1



Fig. 2



Fig. 3



Fig. 4




Fig. 5

Note: The images shown above may differ from the actual product appearances.

- 1) Open the upper cover of the DVR and screw out the bracket.
- 2) Screw HDD onto the HDD bracket. (Refer to Fig.1 & 2)
- 3) Connect the HDD to the power connector and IDE BUS (make sure to align the HDD precisely for pin connection)
And then screw the HDD bracket onto the DVR base. (Refer to Fig. 3)
- 4) Close the upper cover of the DVR. (Refer to Fig. 4 & 5)

APPENDIX #2 – PIN CONFIGURATION

PIN	FUNCTION	DESCRIPTION
1	RS232-TX	DVR can be controlled remotely by the keyboard of PC by using RS-232 serial communication signals.
2	RS232-RX	DVR can be controlled remotely by the keyboard of PC by using RS-232 serial communication signals.
3~6	ALARM INPUT	To connect the wire from ALARM INPUT (PIN 3 -- 6) to GND (PIN 9) connector, DVR will start recording and the buzzer will be on. When "MENU -> CAMERA -> ALARM" is set to "Low" : When the alarm input signal is " Low ", the unit starts to record and buzzer. When "MENU -> CAMERA -> ALARM" is set to "High" : When the alarm input signal is " High ", the unit starts to record and buzzer.
7	EXTERNAL ALARM NC	Under the normal operation, COM connects with NC and disconnects from NO. But when any alarm is triggered, COM disconnects with NC and connects with NO. Attention: The voltage restriction is under AV/DC 30V.
8	EXTERNAL ALARM NO.	Under the normal operation, COM disconnects with NO. But when any alarm is triggered, COM connects with NO. Attention: The voltage restriction is under AV/DC 30V.
9	GND	Signal GND.
10	RS485-B	DVR can be controlled remotely by the keyboard of PC by using RS-485 serial communication signals.
11	RS485-A	DVR can be controlled remotely by the keyboard of PC by using RS-485 serial communication signals.
12~13	PIN OFF	
14	ALARM RESET	Connecting the wire from ALARM RESET (PIN 14) to GND (PIN 9) connector will disable alarms. An external signal to ALARM RESET (PIN 14) can be used to reset both ALARM OUTPUT signal and DVR's internal buzzer. When any alarm has been triggered, the signal becomes "Low", and all alarm activities will be stopped. Under the normal operation, the signal remains "High".
15	EXTERNAL ALARM COM	Under the normal operation, COM disconnects with NO. But when any alarm is triggered, COM connects with NO. Attention: The voltage restriction is under AV/DC 30V.
16~17	GND	Earth GND

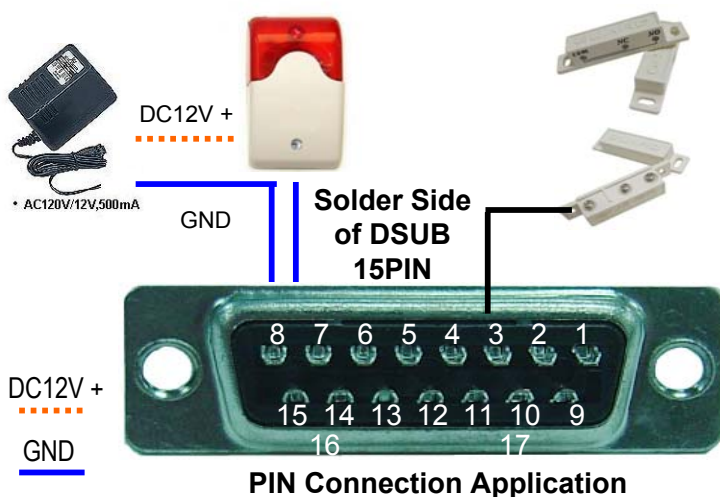


When the magnetic contact is opened, the alarm will be triggered and the recording is on. At the same time, COM connects with NO and the siren with strobe starts wailing and flashing.

NOTE: Please go to MENU -> ADVANCE -> DETECTION -> DETECTION SETUP, and set ALARM to LOW on the local machine.

APPENDIX #3 – RS-232 PROTOCOL

- 1) Use PC keyboards to simulate DVR keypads.
- 2) Data: REMOTE PROTOCOL use 8 bit data, 1 start bit, 1 stop bit.

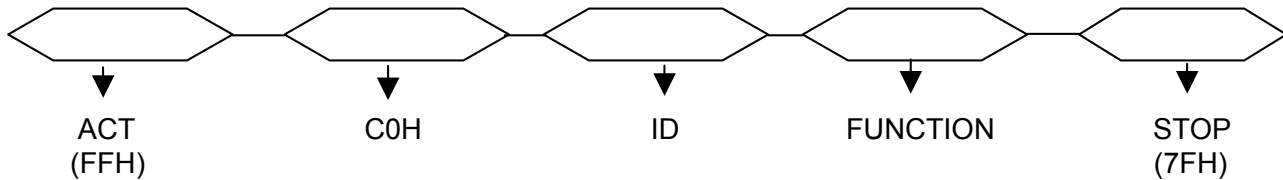

FUNCTION	CODE	ASCII
KEY_MENU	0x4D	M
KEY_ENTER	0x0D	ENTER
KEY_4 CUT	0x61	a
KEY_ZOOM	0x5A	z
KEY_SLOW	0x53	S
KEY_REC	0x72	r
KEY_LEFT	0x4C	L
KEY_UP	0x55	U
KEY_PLAY	0x50	P
KEY_DOWN	0x4E	N
KEY_RIGHT	0x52	R
KEY_POWER	0x57	W
KEY_KEY LOCK	0x4B	K
KEY_CH1	0x31	1
KEY_CH2	0x32	2
KEY_CH3	0x33	3
KEY_CH4	0x34	4

APPENDIX #4 – RECORDING TIME TABLE

● For Model 1 and 2

1) Recording time varies depending on the following factors:

* Different camera quality

* Different picture composition (such as frequency of the object movement)

Record mode	Quality	IPS	500GB record time (hour)	Record day
Frame	Best	30	436.9	18.2
		15	767.6	32
		7	1398	58.2
		3	2258.6	94.1
	High	30	552.8	23
		15	971.3	40.5
		7	1768.9	73.7
		3	2857.9	119.1
	Normal	30	726.2	30.3
		15	1276	53.2
		7	2323.9	96.8
		3	3754.5	156.4
	Basic	30	1173.7	48.9
		15	2062.2	85.9
		7	3755.9	156.5
		3	6068.1	252.8
CIF	Best	120	520.8	21.7
		60	915.1	38.1
		30	1666.7	69.4
		15	2692.7	112.2
	High	120	734.2	30.6
		60	1290	53.8
		30	2349.5	97.9
		15	3795.9	158.2
	Normal	120	966.2	40.3
		60	1697.6	70.7
		30	3091.8	128.8
		15	4995.2	208.1
	Basic	120	1338.7	55.8
		60	2352.1	98
		30	4283.8	178.5
		15	6921	288.4

● **For Model 3 and 4**

1) Recording time varies depending on the following factors:

* Different camera quality

* Different picture composition (such as frequency of the object movement)

Record mode	Quality	IPS	500GB record time (hour)	Record day
Frame	Best	30	127.78	5.3
		15	236.11	9.8
		7	511.11	21.3
		3	980.65	40.9
	High	30	159.72	6.7
		15	305.55	12.7
		7	633.89	26.4
		3	1209.72	50.4
	Normal	30	179.17	7.5
		15	352.78	14.7
		7	626.11	28.6
		3	1263.88	52.7
	Basic	30	222.22	9.3
		15	405.56	16.9
		7	927.78	38.7
		3	1637.5	68.2
CIF	Best	120	763.89	31.8
		60	1416.67	59
		30	2156.94	89.9
		15	4134.72	172.3
	High	120	965.28	40.2
		60	1655.55	69
		30	3398.61	141.6
		15	4833.31	201.4
	Normal	120	1120.83	46.7
		60	2166.38	90.3
		30	4105.56	171.1
		15	5154.17	214.8
	Basic	120	1563.89	65.2
		60	2494.44	103.9
		30	4472.22	186.3
		15	6681.94	278.4

APPENDIX #5 – COMPATIBLE USB FLASH DRIVE BRAND

Please upgrade the firmware of the DVR to the latest version to ensure the accuracy of the following table. If the USB flash drive is not supported by the DVR, the "USB ERROR" message will be shown on the screen.

NOTE: Please use PC to format the USB flash drive as "FAT 32".

Manufacturer	Model	Capacity
Transcend	JetFlash 110	256MB
Transcend	JetFlash 110	512MB
Kingston	DataTraveler DTI KUSBDTI/256FE	256MB
Kingston	DataTraveler DTI KUSBDTI/256FE	512MB
PQI	Cool Drive (U339)	256MB
PQI	Cool Drive (U339)	512MB
Apacer	HANDY STENO HF202	256MB
Apacer	HANDY STENO HF202	512MB
SanDisk	Cruzer Micro	128MB
SanDisk	Cruzer Micro	256MB
SanDisk	Cruzer Micro	512MB

APPENDIX #6 – COMPATIBLE HDD BRAND

Please upgrade the firmware of the DVR to the latest version to ensure the accuracy of the following table.

Brand Name	Model	Capacity	Rotation
HITACHI	Deskstar HDS728080PLAT20	80GB	7200 rpm
HITACHI	Deskstar 180 GXP	120GB	7200 rpm
HITACHI	Deskstar 7K250, HDS722516VLAT20	160GB	7200 rpm
HITACHI	HDS722516VLAT80	160GB	7200 rpm
HITACHI	HDS722516DLAT80	160GB	7200 rpm
HITACHI	Deskstar 7K250, HDS722525VLAT80	250GB	7200 rpm
HITACHI	Deskstar 511DHT0021	500GB	7200 rpm
IBM	Deskstar 120GXP (80GB)	80GB	7200 rpm
IBM	Deskstar 120GXP (120GB)	120GB	7200 rpm
Maxtor	DiamondMax 536DX(60GB) 4W060H4	60GB	5400 rpm
Maxtor	DiamondMax Plus 9	80GB	7200 rpm
Maxtor	DiamondMax Plus 9, Model#6Y120L	120GB	7200 rpm
Maxtor	DiamondMax Plus 9, Model#6Y160L0	160GB	7200 rpm
Maxtor	DiamondMax 10 6L120PO	120GB	7200 rpm
Maxtor	DiamondMax 10 6L160R0	160GB	7200 rpm
Maxtor	DiamondMax 10 6L200R0	200GB	7200 rpm
Maxtor	DiamondMax 10 6L200PO	200GB	7200 rpm
Maxtor	MaxLine Plus II , Model#7Y250P0	250GB	7200 rpm
Maxtor	DiamondMax 10 6L250R0-3	250GB	7200 rpm
Seagate	Barracuda ATA IV, ST380021A	80GB	7200 rpm
Seagate	Barracuda ATA V, ST3120023A	120GB	7200 rpm
Seagate	Barracuda 7200.7 Plus, ST3160023A	160GB	7200 rpm
Seagate	Barracuda 7200.8 ST3200826A	200GB	7200 rpm
Seagate	Barracuda 7200.8 ST3250826A	250GB	7200 rpm
Seagate	Barracuda 7200.8 ST3300831A/P	300GB	7200 rpm
Seagate	Barracuda 7200.8 ST3400832A/P	400GB	7200 rpm
Western Digital	Caviar WD1200BB-00CAA1	120GB	7200 rpm
Western Digital	Caviar SE WD1200JB	120GB	7200 rpm
Western Digital	Caviar SE WD1600JB	160GB	7200 rpm
Western Digital	Caviar WD2000BB-00DWA0	200GB	7200 rpm
Western Digital	CaviarSE WD2500JB	250GB	7200 rpm